

L606 Lubricators – Standard

- Metal bowl with sight gauge - standard
- Polycarbonate sight dome
- Bowl can be filled while air line is under pressure
- Proportional oil delivery over a wide range of air flows
- Large capacity bowl
- Optional high capacity bowl(s) available
- Precision needle valve assures repeatable oil delivery and provides simple adjustment of delivery rate
- 3/4", 1" ports, (NPT, BSPP)



Port size	Description	Part number
3/4"	16 oz. bowl with sight gauge, drain	L606-06W
1"	16 oz. bowl with sight gauge, drain	L606-08W
3/4"	32 oz. bowl without sight gauge, with drain	L606-06E
1"	32 oz. bowl without sight gauge, with drain	L606-08E
3/4"	64 oz. bowl with sight gauge, no drain	L606-06G
1"	64 oz. bowl with sight gauge, no drain	L606-08G

Operating information

Supply pressure (max):

Aluminum (E)	300 psig (20.7 bar)
Aluminum with gauge (G)	150 psig (10.2 bar)
Zinc with gauge (W)	250 psig (17.2 bar)

Operating temperature:

Aluminum (E)	40°F to 150°F (4.4°C to 65.6°C)
Aluminum with gauge (G)	40°F to 125°F (4.4°C to 52°C)
Zinc with gauge (W)	40°F to 150°F (4.4°C to 65.6°C)

Flow capacity†:

High flow	3/4"	325 scfm (153.4 dm³/s, ANR)
	1"	350 scfm (165.2 dm³/s, ANR)

Bowl capacity:

Aluminum (E)	32 oz.
Aluminum with gauge (G)	64 oz.
Zinc with gauge (W)	16 oz.

Weight:

16 oz (W)	4.2 lb (1.91 kg)
32 oz (E)	5.5 lb (2.49 kg)
64 oz (G)	7.2 lb (3.27 kg)

† scfm = Standard cubic feet per minute at 100 psig inlet and 5 psig pressure drop.

() Bowl type.

Ordering information:

L606

-

06

W

/ **

Port Threads

NPT	-
BSPP	G

Port Size

3/4 inch	06
1 inch	08

Bowl

32 oz. Large capacity without sight gauge with drain	E
64 oz. Large capacity with sight gauge	G
16 oz. Metal with sight gauge with drain	W

Engineering Level

/ ** Will be entered at Factory

Options

Blank	None
H	Button head fill fitting
X9*	Manual twist drain (increases product length by 9/16 inch)

* Standard with "E" & "W" bowl, optional with "G" bowl.

Suggested Lubricant **F442 Oil**

Petroleum based oil of 100 to 200 SUS viscosity at 100°F (38°C) and an aniline point greater than 200°F (93°C)

(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

 Most popular.



For inventory, lead times, and kit lookup, visit www.pdnplu.com

H28

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics


Material Specifications

Body	Zinc
Bowl, 32 oz. (E)	Aluminum
Bowl, 64 oz. (G)	Aluminum with polycarbonate sight gauge
Bowl, 16 oz. (W)	Zinc with nylon sight gauge
Seals	Buna N

Repair and Service Kits


Adjusting knob	606Y72
Aluminum 32 oz bowl (E)	BK603B
Aluminum 64 oz bowl with sight gauge (G)	BK606X30B
Zinc 16 oz bowl with sight gauge (W)	BK609WB
Button head fill fitting (M14 male thread)	L606C14
Dip tube kit	DTK606
Drip spout kit	RK606SY
Mounting bracket, 3/4 Inch (2 required per unit)	SA200AW57
Mounting bracket, 1 Inch units (2 required per unit)	SA200CW57
Needle valve assembly (All)	RK606Y
Sight gauge bowl repair kit (W)	RKB605WB
Sight gauge bowl repair kit (G)	RKB606X30B
Oil (1 quart)	F442001
Oil (1 gallon)	F442002
Oil (12 quart case)	F442003
Oil (4 gallon case)	F442005

L606 - 3/4" and 1"

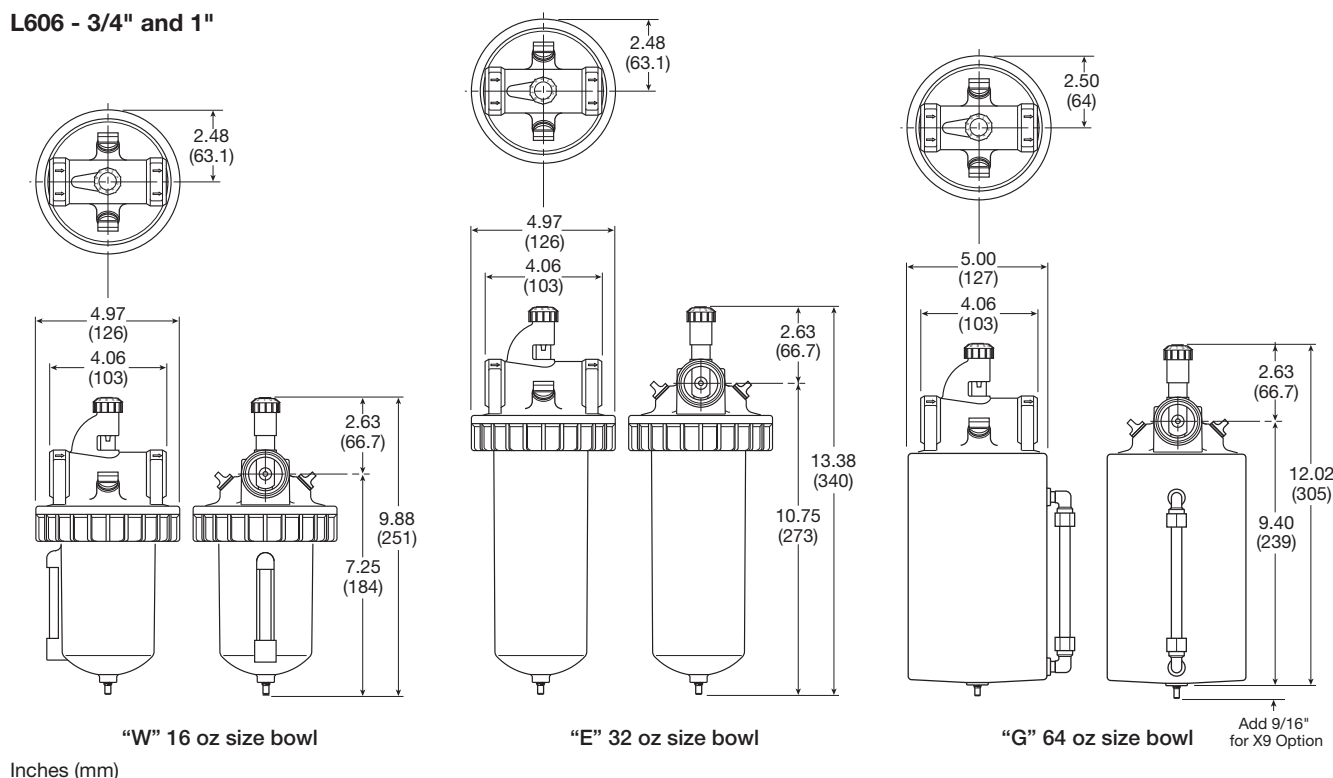


Flow Charts

L606 3/4" Lubricator

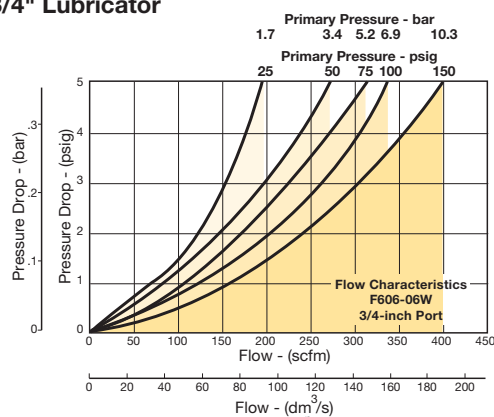

L606 1" Lubricator

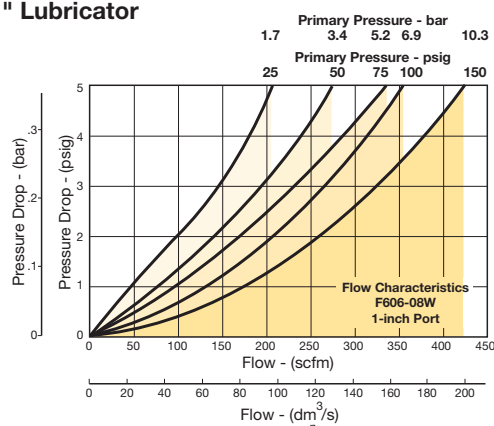

L606 Lubricators – Standard

- Metal bowl with sight gauge - standard
- Polycarbonate sight dome
- Bowl can be filled while air line is under pressure
- Proportional oil delivery over a wide range of air flows
- Large capacity bowl
- Optional high capacity bowl(s) available
- Precision needle valve assures repeatable oil delivery and provides simple adjustment of delivery rate
- 1-1/2" ports (NPT, BSPP)



Port size	Description	Part number
1-1/2"	16 oz. bowl with sight gauge, drain	L606-12W
1-1/2"	32 oz. bowl without sight gauge, with drain	L606-12E
1-1/2"	64 oz. bowl with sight gauge, no drain	L606-12G

Operating information

Supply pressure (max):

Aluminum (E)	300 psig (20.7 bar)
Aluminum with gauge (G)	150 psig (10.2 bar)
Zinc with gauge (W)	250 psig (17.2 bar)

Operating temperature:

Aluminum (E)	40°F to 150°F (4.4°C to 65.6°C)
Aluminum with gauge (G)	40°F to 125°F (4.4°C to 52°C)
Zinc with gauge (W)	40°F to 150°F (4.4°C to 65.6°C)

Flow capacity†:

High flow	1-1/2"	400 scfm (188.8 dm³/s, ANR)
-----------	--------	-----------------------------

Bowl capacity:

Aluminum (E)	32 oz.
Aluminum with gauge (G)	64 oz.
Zinc with gauge (W)	16 oz.

Weight:

16 oz	7.5 lb (3.40 kg)
32 oz	8.3 lb (3.76 kg)
64 oz	10.0 lb (4.54 kg)

† scfm = Standard cubic feet per minute at 100 psig inlet and 5 psig pressure drop.
 () Bowl type.

Ordering information:

L606	-	12	W		/**
Port Threads NPT - BSPP G		Port Size 1-1/2 inch 12		Engineering Level /** Will be entered at Factory	
Bowl 32 oz. Large capacity without sight gauge with drain E 64 oz. Large capacity with sight gauge G 16 oz. Metal with sight gauge with drain W		Options Blank None H Button head fill fitting X9* Manual twist drain (increases product length by 9/16 inch)			

* Standard with "E" & "W" bowl, optional with "G" bowl.

Suggested Lubricant **F442 Oil**

Petroleum based oil of 100 to 200 SUS viscosity at 100°F (38°C) and an aniline point greater than 200°F (93°C)

(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

Most popular.



For inventory, lead times, and kit lookup, visit www.pdnplu.com

H30

Parker Hannifin Corporation
 Pneumatic Division
 Richland, Michigan
www.parker.com/pneumatics

Material Specifications


Body	Zinc
32 oz. bowl (E)	Aluminum
64 oz. bowl (G)	Aluminum with polycarbonate sight gauge
16 oz. bowl (W)	Zinc with nylon sight gauge
Seals	Buna N

Repair and Service Kits


Adjusting knob	606Y72
Aluminum 32 oz. bowl (E)	BK603B
Aluminum 64 oz. bowl with sight gauge (G)	BK606X30B
Zinc 16 oz. bowl with sight gauge (W)	BK609WB
Button head fill fitting (M14 male thread)	L606C14
Dip tube kit	DTK606
Drip spout kit	RK606SY
Needle valve assembly (All)	RK606Y
Sight gauge 16 oz. bowl repair kit (W)	RKB605WB
Sight gauge 64 oz. bowl repair kit (G)	RKB606X30B
Oil (1 quart)	F442001
Oil (1 gallon)	F442002
Oil (12 quart case)	F442003
Oil (4 gallon case)	F442005

Flow Charts

L606 1-1/2" Lubricator

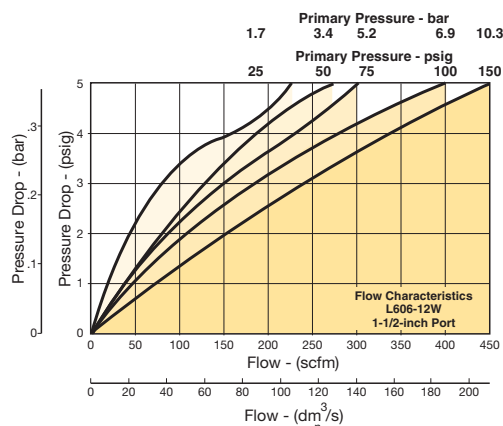

L606 - 1-1/2"

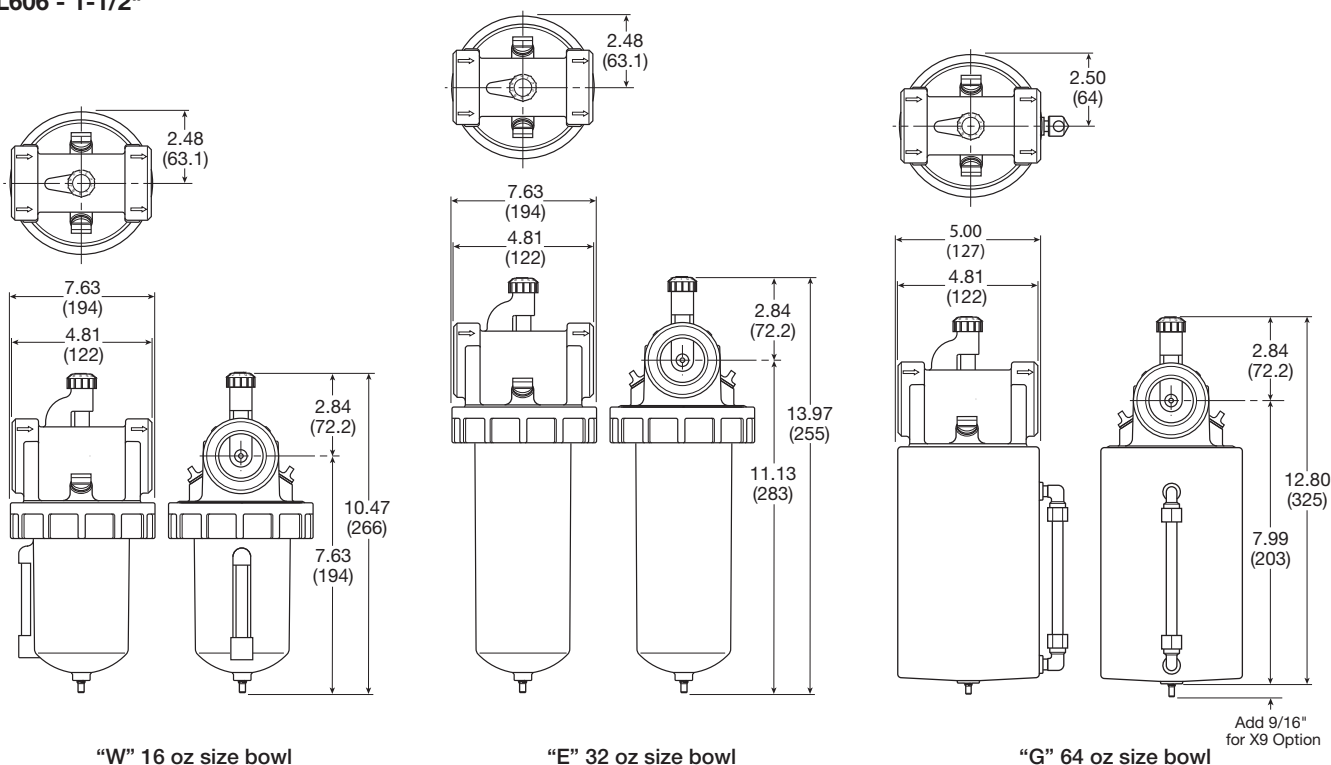

Inches (mm)



For inventory, lead time, and kit lookup, visit www.pdnplu.com

H31

Parker Hannifin Corporation
 Pneumatic Division
 Richland, Michigan
www.parker.com/pneumatics

General Industrial
 Products

H

Filters

Coalescers

Regulators

Lubricators

Combinations

09L Mist Lubricators – Hi-Flow

- Metal bowl with sight gauge and manual drain – standard
- Transparent sight dome for 360° visibility
- Bowl can be filled while air line is under pressure
- Proportional oil delivery over a wide range of air flows
- 2" ports (NPT)



Port size	Description	Part number
2"	Metal bowl, sight gauge, 1 quart	09L84BA
2"	Metal bowl, sight gauge, 3 quart	09L8PBA

Operating information			
Supply pressure (max):		150 psig (10.3 bar)	
Operating temperature:		32°F to 150°F (0°C to 66°C)	
Flow capacity†:			
High flow	2"	1000 scfm (472 dm³/s, ANR)	
Minimum flow		6.6 scfm at 100 psig	
Bowl capacity:		1 qt. (standard)	
Weight:	1 qt	10.2 lb (4.6 kg)	
	3 qt	13.7 lb (6.2 kg)	
† scfm = Standard cubic feet per minute at 90 psig inlet and 5 psig pressure drop.			

Ordering information:

09L

8

4

B

A

Port Size
2 inch 8

Bowl Options
Metal bowl, 1 quart, sight gauge / manual drain 4
Metal bowl, 3 quart, sight gauge / manual drain P

Engineering Level
A Current

Options
B Without tamperproof cap

Port Type
Blank NPT

Suggested Lubricant**F442 Oil**
Petroleum based oil of 100 to 200 SUS viscosity at 100°F (38°C) and an aniline point greater than 200°F (93°C)
(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

Most popular.





For inventory, lead times, and kit lookup, visit www.pdnplu.com

High-Flow Mist Lubricators**Material Specifications**

Body	Zinc alloy, die cast
------	----------------------

Repair and Service Kits

Fill cap kit	PS610P
Lubricator service kit	PS607P
Metal bowl, 1 quart, sight gauge / twist drain	PS612P
Sight dome kit	PS613P
Oil (1 quart)	F442001
Oil (1 gallon)	F442002
Oil (12 quart case)	F442003
Oil (4 gallon case)	F442005

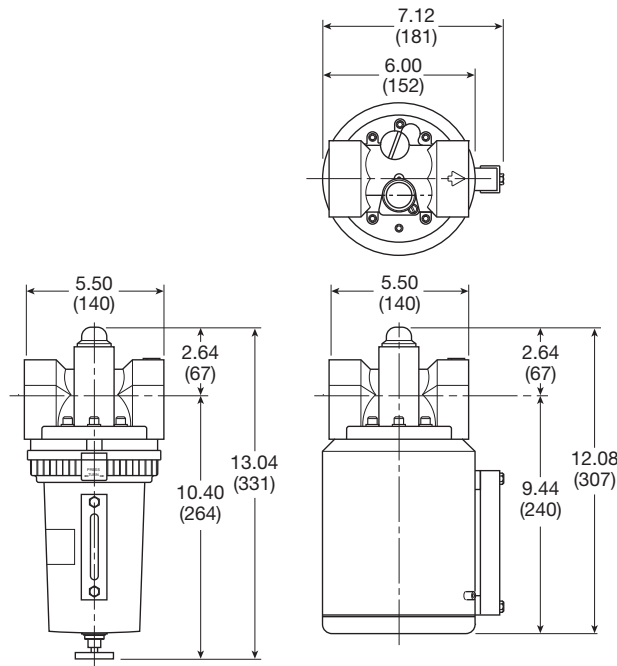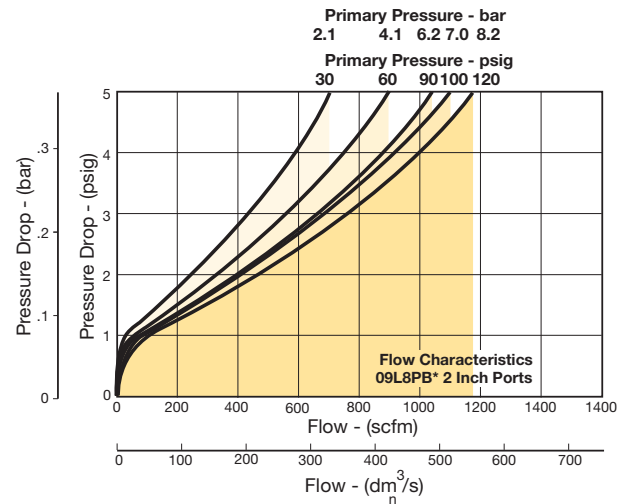**Air Preparation Products
General Industrial****Flow Charts****09L 2" Lubricator**

Inches (mm)

1 Quart

3 Quart

General Industrial
Products

H

Filters

Coalescers

Regulators

Lubricators

Combinations



For inventory, lead time, and kit
lookup, visit www.pdnplu.com

H33

Parker Hannifin Corporation
Pneumatic Division
Richland, Michigan
www.parker.com/pneumatics