



H Series Industrial Communication System

Moduflex Bus / TURCK BL67

*H Series Industrial Communication System for **centralised** and **decentralised** applications*



H Series Industrial Communication System for Centralised applications

H Series Industrial Communication System has 4 major components :

- **Communication interface modules** provide the network-interface circuitry
- **I/O modules** provide the field interface, system-interface circuitry, and bases for mounting
- **Power distribution module** provide the solution to expandability of the H Series Industrial Communication System or multiple power supply

Moduflex Bus System for Decentralised applications

The Moduflex communication module is directly attach the either, a Moduflex, H Series Micro or H Series ISO manifold in a compact valve island directly connectable to the industrial network.

Pneumatic variants using H Series Industrial Communication system for Centralised applications

Device with electric modules only



H Series Industrial Communication with H Series Micro Valves extended device



H Series Industrial Communication with H Series Micro Valves island



H Series Industrial Communication with H Series ISO valves island

ISO 15407-2 – HA & HB
ISO 5599-2 – H1 to H3



Pneumatic variants using Moduflex Fieldbus modules for Decentralised applications

Moduflex Bus with Moduflex Valve System



Moduflex Bus with H Series Micro Valves island



Moduflex Bus With H Series ISO 15407-2 or 5599-2 valves island

ISO 15407-2 – HA & HB
ISO 5599-2 – H1 to H3




Pneumatic variants using TURCK BL67 H Series Industrial Communication system for Centralised applications

TURCK BL67 with H Series Micro Valves Island



TURCK BL67 with H Series ISO Valves Island

ISO 15407-2 – HA & HB
ISO 5599-2 – H1 to H3

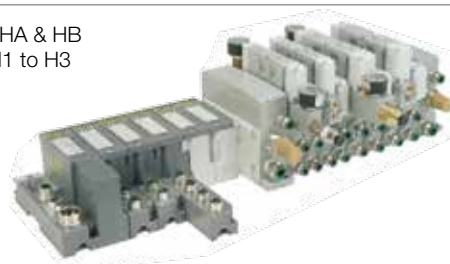

H Series Industrial Communication Device constitution overview for a Centralised application


For main device



For both main and extended devices



For extended device



Communication modules :

- Fieldbus or Industrial Ethernet protocol
- Network connection
- Separated 24VDC for logic and user power supply
- Configuration with coding wells and bus status display by LED

Bus extender cable :

- Cable linking extended device through the Sub-network
- Sub-network connection from H Series Industrial Communication module or H Series Micro Valve driver
- Transferring both sub-network communication and 5VDC for bus power supply

I/O modules :

- Choice of Digital or Analogic I/O modules offering multiple industrial connection types
- Connection to the Sub-network and the separated 24VDC for both logic and user through the socket
- I/O and sub-network status display by LEDs

Power extender module :

- Additional separated 24VDC power supply for logic and user allowing multiple permanent or safety power supply recommendations
- Both Logic and User electrical power supply display by separated LEDs


End section :

- Specific socket or valve driver without extender bus connector for end section

Prologation section :

- Specific socket with sub-network extender cable and extended device head plate
- Valve driver including extender bus connector for sub-network continuity

Moduflex constitution overview for a Decentralised application

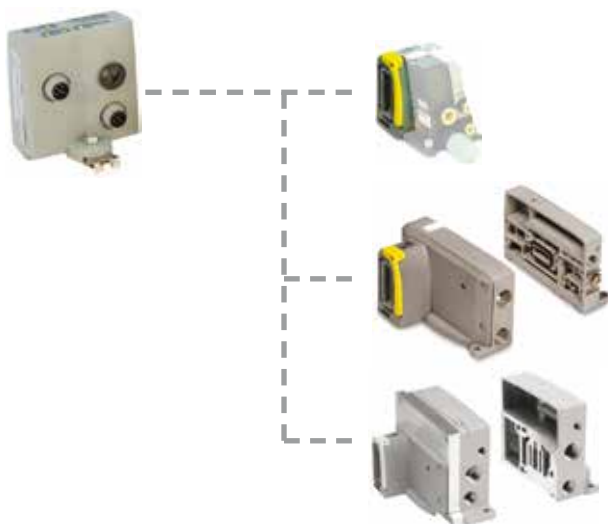

Communication module :


- Fieldbus protocols
- Network connection
- Separated power supply for communication and solenoid valves
- Addressing and speed communication configuration by coding wells
- Bus status display by LED

Bus module adaptor :

Using the appropriate adaptor, the Moduflex Bus module can be assembled to :

- Moduflex Valve System
- H Series Micro Valves
- H Series ISO 15407-2 – HA & HB
- H Series ISO 5599-2 – H1

TURCK BL67 Device constitution overview for a Centralised application

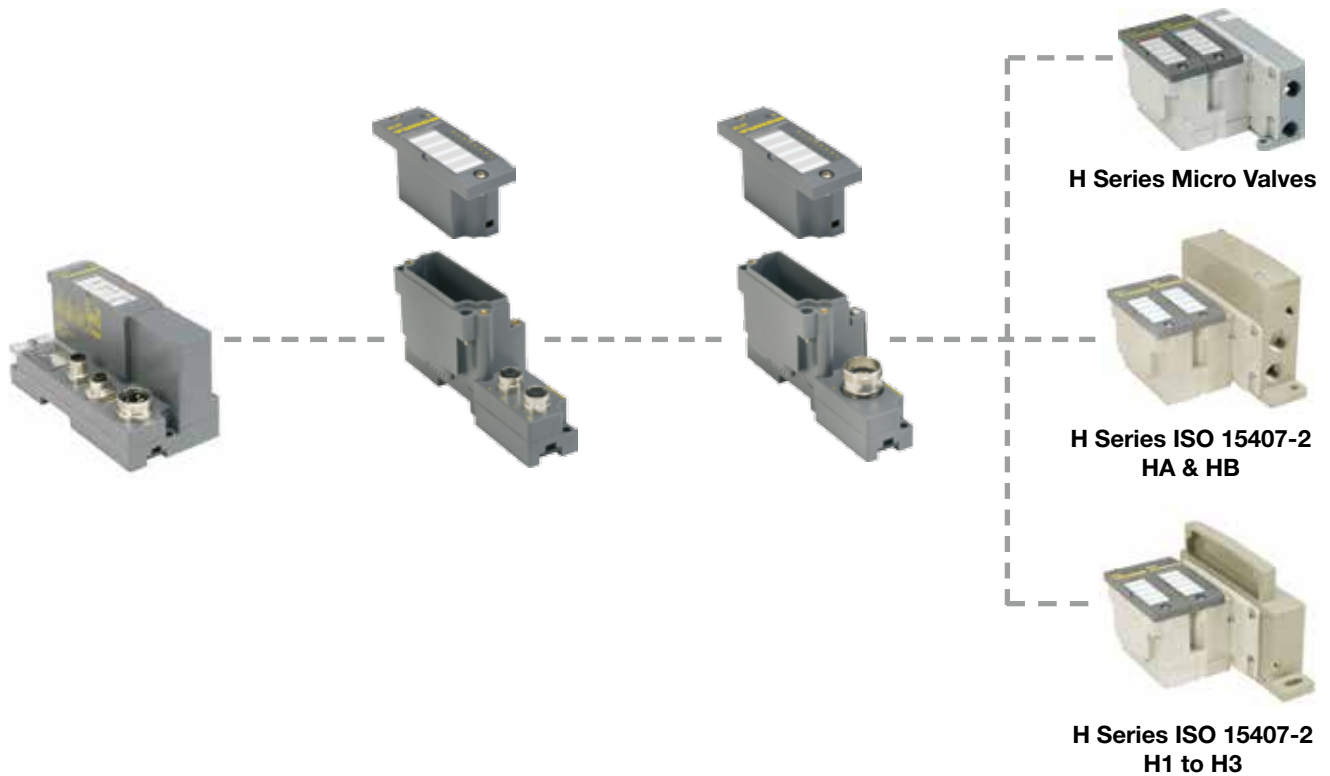

TURCK BL67 communication gateway

H Series Industrial Communication :

- Linked to a TURCK BL67 communication module (programmable or not programmable), the device can be connected to a wide choice of Fieldbus or Industrial Ethernet protocols.

TURCK BL67 I/O and Base modules

The separation between electronic and base module for connectivity allows to complete the device with a choice through a full digital or analogue **I/O modules** range populating the **base module** existing with a multiple choice of electrical connection (M8, M12, M23)

The complete resulting configuration can handle :

- Up to 32 electrical modules (up to 2 in the Valve Driver Module)
- Up to 512 digital I/O (up to 32 outputs in the Valve Driver Module)
- Up to 128 analog I/O

Other TURCK BL67 Electronic modules

Other electronic modules, as CANopen gateway allowing a sub-network connectivity with other CANopen slaves, RFID System or counting modules complet the full TURCK BL67 Remote I/O System.

Valve driver Module for 16 or 32 Outputs

Modularity up to 16 or 32 Outputs :

Thanks to its modularity, the H Series Micro Valve Driver Module to Turck BL67 Remote I/O System adaptor can be configure up to either a 16 or 32 solenoid valves configuration :

For a light configuration up to 16 solenoid valves (2 double address or 4 single address manifolds), the Valve Driver Module can be optimized being populated with:

- 1 Standard Turck 16 DO module BL67-16DO-0.1A-P in slot 1
- 1 blank module BL67-E in slot 2

For a full configuration up to 32 solenoid valves (4 double address or 8 single address manifolds), the Valve Driver Module must be fully populated with 1 Standard Turck 16 DO module BL67-16DO-0.1A-P in each slot.

H Series Industrial Communication modules



A choice of different protocols to connect the Isysnet device to the requested industrial network :

- DeviceNet
- Profibus DP
- ControlNet
- Ethernet I/P

Digital and Analogue I/O modules :



Application always needs a wide sensor quantity, diversity and additional electric actuators as well, with an appropriate electrical connection.

With a modularity from 2 to 16 channels, the wide range of digital or analogue inputs and outputs modules offers a choice of industrial connection :

- M8 -3 PINs
- M12 -5 PINs
- M23 - 12 PINs

Extension power supply module :



The auxiliary power from the communication module supports up to 10 I/O modules. For applications requiring a larger I/O module quantity, this 24VDC extension power module extends the backplane bus power to support up to 10 more I/O modules.

Also, when safety recommendations require multiple permanent and safety power supplies, this 24VDC extension power module avoids the need for a separate power supply section in the H Series Industrial Communication device.

H Series Industrial Communication and H Series Micro Valve bus extender cable



An H Series Industrial Communication device can be split into the H Series Industrial Communication section or, from an H Series Micro valve manifold to an extended section. Both cables avoid the backplane Bus power and communication.

The H Series Industrial Communication device has to be closed with a 32 output driver (internally ending the backplane bus) or using the terminating base module

32 Outputs driver for valve islands in centralised applications

32 Outputs driver for H Series Micro Valve Islands



- H Series Micro valve nominal flow up to 280 NI/mn
- 32 outputs per module to handle up to 32 solenoids per valve island
- Up to 4 valve islands linked through the internal sub-network for a total of 128 solenoids per device
- With or without additional user power supply
- With or without bus extender

32 Outputs driver for H Series ISO Valve Islands



ISO 15407-2

ISO 5599-2

- | | | | |
|---------------|--------------|-------|------------|
| • ISO 15407-2 | Size 02 (HB) | 18 mm | 380 NI/mn |
| • ISO 15407-2 | Size 01 (HA) | 26 mm | 590 NI/mn |
| • ISO 5599-2 | Size 1 (H1) | 42 mm | 1030 NI/mn |
- 32 outputs per module to handle up to 32 solenoids per valve island.

Moduflex fieldbus modules for valve islands in decentralised applications

Moduflex fieldbus adaptor for H Series Micro and H Series ISO valve islands



Moduflex valve system



H Series Micro Valves

- Compatible with all Moduflex fieldbus protocol modules handling up to 16 solenoids:
 - DeviceNet
 - CANopen
 - Profibus DP
 - InterBus-S
 - AS-i standard and extended a-b coding versions.



ISO 15407-2
HA - HB



ISO 5599-2
H1

TURCK BL67 H Series Industrial Communication modules



- A choice of different protocols to connect the TURCK BL67 device to the requested industrial network:
 - CANopen
 - DeviceNet
 - Profibus DP
 - Ethernet Modbus TCP, EtherNet/IP™ and PROFINET

Programmable versions



TURCK BL67 Electronic and Base Modules



The separation between electronic and base module for connectivity allows to complete the device with a choice through a full digital or analogue **I/O modules** range populating the **base module** existing with a multiple choice of electrical connection (M8, M12, M23)

The complete resulting configuration can handle :

- Up to 32 electrical modules (up to 2 in the Valve Driver Module)
- Up to 512 digital I/O (up to 32 outputs in the Valve Driver Module)
- Up to 128 analog I/O

32 Outputs Driver for H Series Micro and H Series ISO Valve Islands



H Series Micro Valves




ISO 15407-2
HA & HB



ISO 15407-2
H1 to H3

- H Series Micro 4 valve function in 42 mm 280 NI/mn
- ISO 15407-2 Size 02 (HB) 18 mm 390 NI/mn
- ISO 15407-2 Size 01 (HA) 26 mm 920 NI/mn
- ISO 5599-2 Size 1 (H1) 42 mm 1200 NI/mn
- ISO 5599-2 Size 2 (H2) 56 mm 2500 NI/mn
- ISO 5599-2 Size 3 (H3) 71 mm 5000 NI/mn
- Modularity of 16 or 32 outputs per module to handle up to 32 solenoids per valve island.

DeviceNet communication module

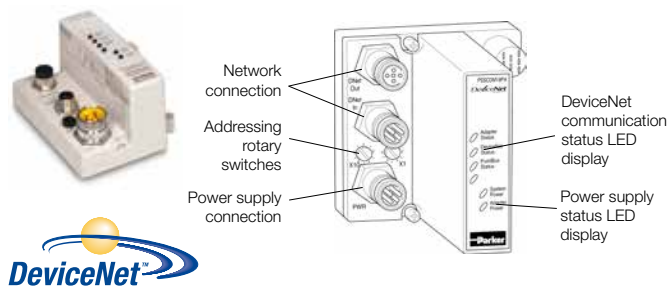


DeviceNet Adapters

DeviceNet module order code

PSSCDM12A**PSSCDM18PA**

Adapters connection

Power supply connection
7/8" - 4 PINs - Male :


- PIN 1 : User power +
- PIN 2 : Adapter power +
- PIN 3 : Adapter power -
- PIN 4 : User power -

Bus IN connection

M12 - 5 PINs - Male - A coding



M18 - 5 PINs - Male :




- PIN 1 : Drain
- PIN 2 : DeviceNet V+
- PIN 3 : DeviceNet V-
- PIN 4 : CAN High
- PIN 5 : CAN Low

Bus OUT connection

M12 - 5 PINs - Female - A coding



M18 - 5 PINs - Female :



- PIN 1 : Drain
- PIN 2 : V+
- PIN 3 : V-
- PIN 4 : CAN High
- PIN 5 : CAN Low

LED display

- 1 - Adapter status : green/red
- 2 - DeviceNet status : green/red
- 3 - Status : green/red
- 4 - System power (5V power) : green
- 5 - Adapter power (24V from field supply) : green


DeviceNet communication module connection accessories



P8CS1205BA

Description	Connector type	W (g)	Order code
Power supply connector	7/8" - 4 PINs	40	P8CS7804AA
Bus IN connector	M12 female - A coding	25	P8CS1205AA
Bus OUT connector	M12 male - A coding	25	P8CS1205BA
Line terminaiton	M12 male - A coding	25	P8BPA00MA

Profibus DP communication module

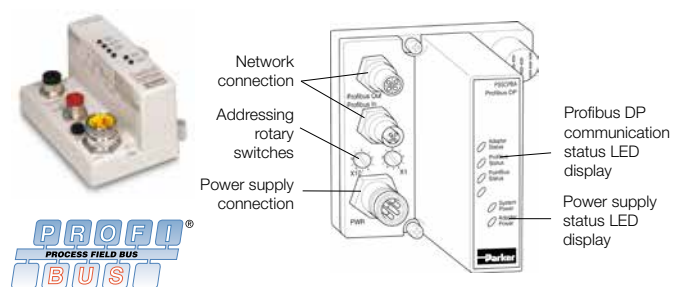

Profibus DP Adapters

Profibus DP module order code

PSSCPBA

Adapters connection

Power supply connection
7/8" - 5 PINs - Male :

- PIN 1 : User power +
- PIN 2 : Adapter power +
- PIN 3 : Protective GND
- PIN 4 : Adapter power -
- PIN 5 : User power -

Bus IN connection


M12 - 5 PINs - Male - B coding



- PIN 1 : + 5 VDC Bus
- PIN 2 : A - Line
- PIN 3 : GND Bus
- PIN 4 : B - Line
- PIN 5 : Shield

Bus OUT connection

M12 - 5 PINs - Female - B coding



- PIN 1 : + 5 VDC Bus
- PIN 2 : A - Line
- PIN 3 : GND Bus
- PIN 4 : B - Line
- PIN 5 : Shield

LED display

- 1 - Adapter status : green/red
- 2 - Profibus DP status : green/red
- 3 - Bus status : green/red
- 4 - System power (5V power) : green
- 5 - Adapter power (24V from field supply) : green


Profibus DP communication module connection accessories




P8CS1205BB

Description	Connector type	W (g)	Order code
Power supply connector	7/8" - 5 PINs	40	P8CS7805AA
Bus IN connector	M12 female - B coding	25	P8CS1205AB
Bus OUT connector	M12 male - B coding	25	P8CS1205BB
Line terminaiton	M12 male - B coding	25	P8BPA00MB


ControlNet communication module

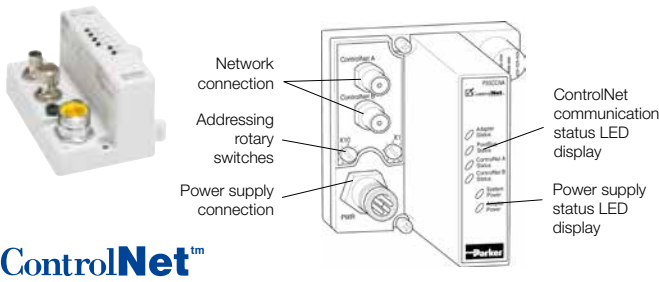


ControlNet™

ControlNet Adapters	
ControlNet module order code	
PSSCCNA	
Adapters connection	
Power supply connection 7/8" - 4 PINs - Male :	
	- PIN 1 : User power + - PIN 2 : Adapter power + - PIN 3 : Adapter power - - PIN 4 : User power -
ControlNet IN connection	TNC style connector
ControlNet OUT connection	TNC style connector
LED display 1 - Adapter status : green/red 2 - Bus status : green/red 3 - ControNet A status : green/red 4 - ControNet B status : green/red 5 - System power (Bus 5V power) : green 6 - Adapter power (24V from field supply) : green	

Ethernet I/P communication module

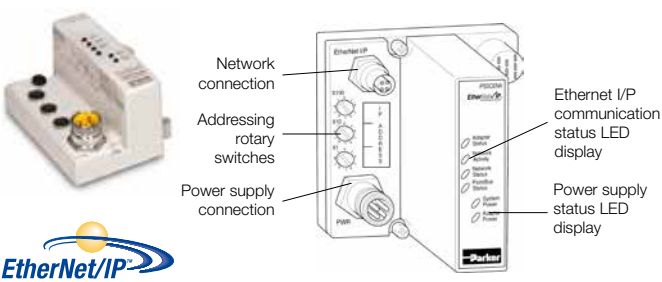

EtherNet/IP™

Ethernet I/P Adapters	
Ethernet I/P module order code	
PSSCENA	
Adapters connection	
Power supply connection 7/8" - 4 PINs - Male :	
	- PIN 1 : User power + - PIN 2 : Adapter power + - PIN 3 : Adapter power - - PIN 4 : User power -
Ethernet I/P connection M12 - 4 PINs - Female - D coding :	
	- PIN 1 : Tx + - PIN 2 : Rx + - PIN 3 : Tx - - PIN 4 : Rx -
LED display 1 - Adapter status : green/red 2 - Network activity : green 3 - Network status : green/red 4 - Bus status : green/red 5 - System power (Bus 5V power) : green 6 - Adapter power (24V from field supply) : green	

ControlNet communication module connection accessories




Description	Connector type	W (g)	Order code
Power supply connector	7/8" - 4 PINs	40	P8CS7804AA

Ethernet I/P communication module connection accessories




Description	Connector type	W (g)	Order code
Power supply connector	7/8" - 4 PINs	40	P8CS7804AA

Digital Input modules

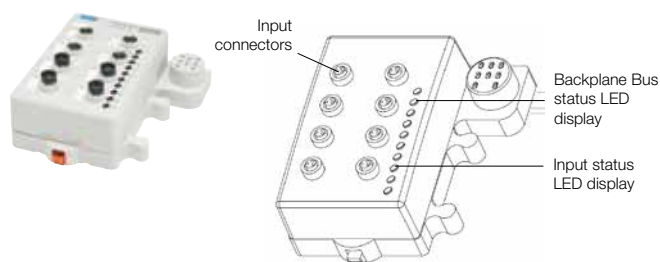

Digital DC Input modules		
Input module order code		
PSSN8M8A	PSSN8M12A	PSSP8M12A
		
Nb of Inputs		
8	8	8
Nb of Input connectors		
8 x M8	4 x M12	4 x M12
Input density/connector		
1	2	2
Sensor polarity		
PNP	PNP	NPN
Input module connection		
Input connector		
M8 - 3 PINs Female	M12 - 5 PINs Female	
		
- PIN 1 : +24 VDC - PIN 3 : Common - PIN 4 : Input	- PIN 1 : +24 VDC - PIN 2 : Odd input (1, 3, 5, 7) - PIN 3 : Common - PIN 4 : Even input (0, 2, 4, 6) - PIN 5 : n/a	
Input status LED display (Logic side)		
8 x Yellow / Red		
Backplane Bus status LED display (Logic side)		
Module status : 1 x green / red Network status : 1 x green / red		

Digital Output modules

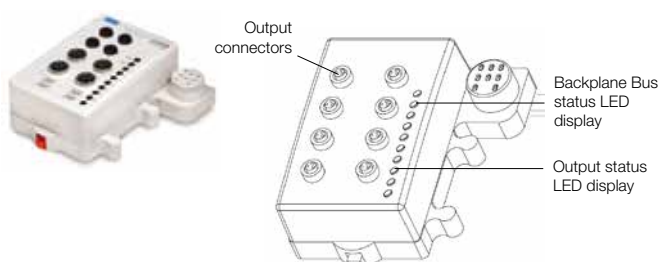

Digital DC Output modules			
Output module order code			
PSST8M8A	PSST8M12A	PSST8M23A	PSSTR4M12A
Nb of Outputs			
8	8	8	8
Nb of Output connectors			
8 x M8	4 x M12	1 x M23	4 x M12
Output density/connector			
1	2	8	1
Output module connection			
Output connector			
M8 - 3 PINs Female	M12 - 5 PINs Female	M23 - 12 PINs Female	M12 - 5 PINs Female
- PIN 1 : +24 VDC - PIN 3 : Common - PIN 4 : Outputs (0 to 7)	- PIN 1 : +24 VDC - PIN 2 : Odd output (1, 3, 5, 7) - PIN 3 : Common - PIN 4 : Even output (0, 2, 4, 6) - PIN 5 : n/a	- PIN 1 : Output 0 - PIN 2 : Output 1 - PIN 3 : Output 2 - PIN 4 : Output 3 - PIN 5 : Output 4 - PIN 6 : Output 5 - PIN 7 : Output 6 - PIN 8 : Output 7 - PIN 9 : Return (common) - PIN 10 : Return (common) - PIN 11 : +24 VDC - PIN 12 : Chassis	- PIN 1 : +24 VDC - PIN 2 : Odd outputs - PIN 3 : Common - PIN 4 : Even outputs - PIN 5 : n/a
Output status LED display (Logic side)			
8 x Yellow / Red			4 x Yellow/Red
Backplane Bus status LED display (Logic side)			
Module status : 1 x green / red Network status : 1 x green / red			

Backplane Bus accessories



Description	Cable length	W (g)	Order code
Backplane Bus extender	1 meter	380	PSSEXT1
	3 meter	760	PSSEXT3
Termination module		200	PSSTERM

Connectors for outputs



Description	Connector type	W (g)	Order code
Cable quick connect connector	M8 male	25	P8CS0803J
	M12 male - A coding	25	P8CS1204J
Y shape	M12 male - 2 x M12 female	25	P8CSY1212A

Backplane Bus accessories




Description	Cable length	W (g)	Order code
Backplane Bus extender	1 meter	380	PSSEXT1
	3 meter	760	PSSEXT3
Termination module		200	PSSTERM


Connectors for outputs




Description	Connector type	W (g)	Order code
Cable quick connect connector	M8 male	25	P8CS0803J
	M12 male - A coding	25	P8CS1204J
Y shape	M12 male - 2 x M12 female	25	P8CSY1212A


Analogue Input modules

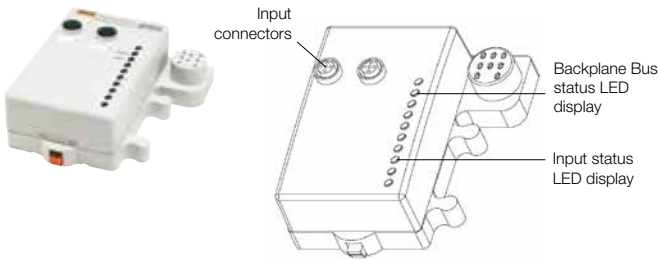

Analogue Input modules		
Input module order code	PSSNAVM12A	PSSNACM12A
		
Nb of Inputs	2	2
Nb of Input connectors	2 x M12	2 x M12
Input density/connector	1	1
Input signal	0 - 10 V	4 - 20 mA
Analogue Input module connection		
Input connector	M12 - 5 PINs - Female  - PIN 1 : +24 VDC - PIN 2 : Inputs - PIN 3 : Common - PIN 4 : Common - PIN 5 : n/a	
Input status LED display (Logic side)	2 x green / red	
Backplane Bus status LED display (Logic side)	Module status : 1 x green / red Network status : 1 x green / red	

Analogue Output modules

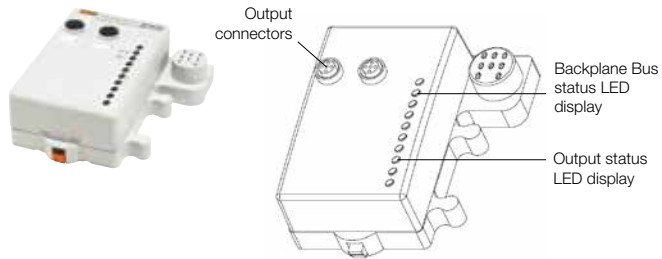

Analogue Output modules		
Output module order code	PSSTAVM12A	PSSTACM12A
		
Nb of Outputs	2	2
Nb of Output connectors	2 x M12	2 x M12
Output density/connector	1	1
Output signal	0 - 10 V	4 - 20 mA
Analogue Output module connection		
Output connector	M12 - 5 PINs - Female  - PIN 1 : Outputs - PIN 2 : +24 VDC - PIN 3 : Common - PIN 4 : Common - PIN 5 : n/a	
Output status LED display (Logic side)	2 x green / red	
Backplane Bus status LED display (Logic side)	Module status : 1 x green / red Network status : 1 x green / red	

Backplane Bus accessories

			
Description	Cable length	W (g)	Order code
Backplane Bus extender	1 meter	380	PSSEXT1
	3 meter	760	PSSEXT3
Termination module		200	PSSTERM

Connectors for inputs

			
P8CS1205BA			
Description	Connector type	W (g)	Order code
Straight connector	M12 male - A coding	25	P8CS1205BA


Backplane Bus accessories

			
Description	Cable length	W (g)	Order code
Backplane Bus extender	1 meter	380	PSSEXT1
	3 meter	760	PSSEXT3
Termination module		200	PSSTERM

Connectors for outputs

			
P8CS1205BA			
Description	Connector type	W (g)	Order code
Straight connector	M12 male - A coding	25	P8CS1205BA

32 Output drivers

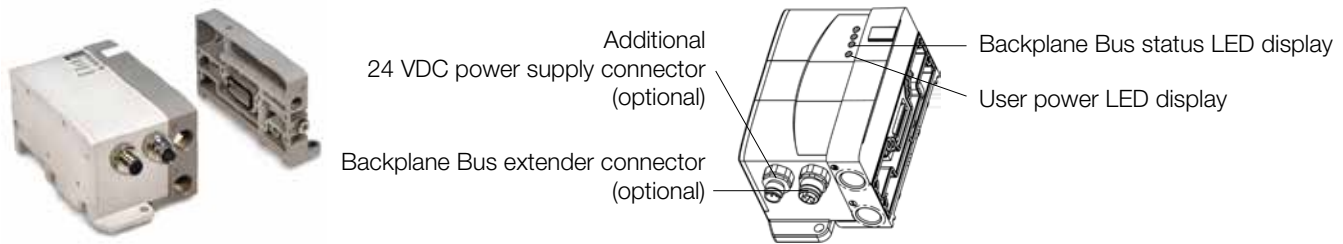


32 Output driver modules							
Dedicated valve range		H Series Micro Valves				H Series ISO 15407-2	H Series ISO 5599-2
32 Output driver modules order code	Side ported	PSML61AP	PSMM61AP	PSMM71AP	PSMM51AP	PS5620L61P	PS4020L61CP
	Bottom ported	PSML62AP	PSMM62AP	PSMM72AP	PSMM52AP	-	-
							
Pneumatic port sizes	Power supply	G3/8"					
	Exhaust	G3/8"					
Pneumatic pilot port sizes	Power supply	Internal or M7				Internal	
	Exhaust	G1/8"				Internal	
32 Output driver module connection							
24 VDC power supply connector	NO	YES	YES	NO	NO	NO	
		M12 - 5 PINs - Male  - PIN 1 : +24 VDC - PIN 2 : n/a - PIN 3 : Common - PIN 4 : n/a - PIN 5 : Protective Earth					
Backplane Bus Extender connector	NO	NO	YES	YES	NO	NO	
			M12 - 5 PINs - Female To use with PSSVEXT1  - PIN 1 : CAN SHLD - PIN 2 : CAN V+ - PIN 3 : CAN GND - PIN 4 : CAN High - PIN 5 : CAN Low				
Backplane Bus status LED display (Logic side)		Backplane Bus power supply : 1 x green / red Backplane Bus status : 1 x green / red Output fault : 1 x red Valve power supply : 1 x green				Module status : 1 x green / red Backplane Bus status : 1 x green/red Output fault : 1 x yellow / red	

Backplane Bus and Solenoid Valves Power Supply Sourcing :

H Series Micro 32 output driver modules


H Series ISO 32 output driver modules

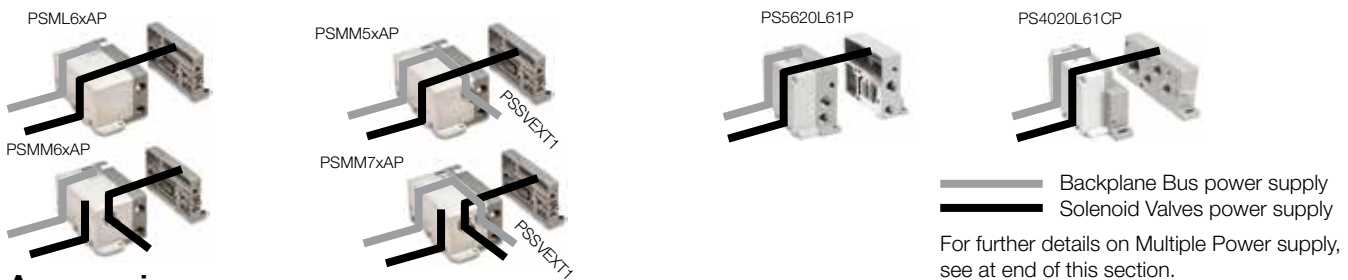

Accessories

	Description	Connector type	W (g)	Order code
	Backplane Bus extension cable with 1 meter cable	M12 male - A coding Head plate	380	PSSVEXT1
	Connector for 24 VDC power supply connector	M12 Female - A coding	25	P8CS1205AA
	Line termination	M12 Male - A coding	25	P8BPA00MA

Power Extender module

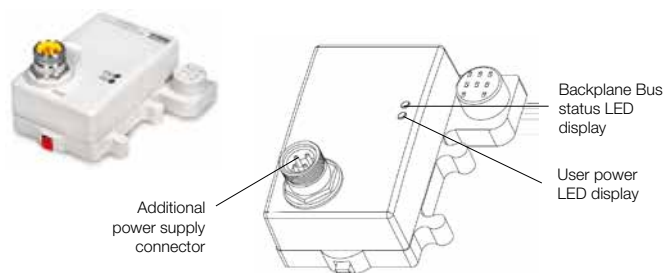

Backplane Bus Extension Power Supply module

Power Supply Extender module order code	PSSE24A
Extender module connection	
Power supply connection	7/8" - 4 PINs - Male
	- PIN 1 : User power + - PIN 2 : Backplane bus power + - PIN 3 : Backplane bus power + - PIN 4 : User power -
Status LED display (Logic side) 1 x green	Field power status : 1 x green 5 VDC system power status:

Backplane Bus connector




Description	Connector type	W (g)	Order code
Power supply connector	7/8" - 4 PINs	40	P8CS7804AA

Backplane Bus accessories



Description	Cable length	W (g)	Order code
Backplane Bus extender from Industrial communication module	1 meter	380	PSSEXT1
	3 meter	760	PSSEXT3
Backplane Bus extender cable from 32 outputs driver	1 meter	380	PSSVEXT1

AS-interface communication module

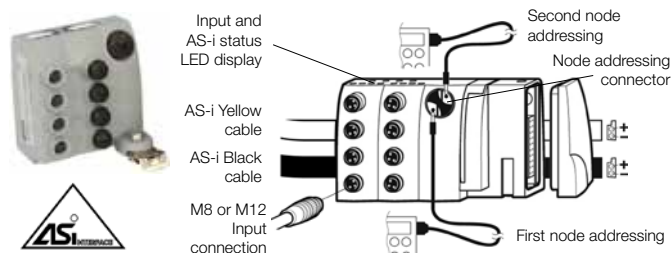

AS-i Adapters

P2M2HBVA 10400	P2M2HBVA 10800	P2M2HBVA 20600	P2M2HBVA 10808A	P2M2HBVA 20608A	P2M2HBVA 10404B	P2M2HBVA 10404B	P2M2HBVA 20608B
							
AS-i Version							
V2.0	V2.0	V2.1	V2.0	V2.1	V2.0	V2.0	V2.1
Number of addresses							
1 / 31	2 / 31	2 / 31a + 31b	2 / 31	2 / 31a + 31b	1 / 31	2 / 31	2 / 31a + 31b
Nb of outputs for solenoid valves							
4	8	6	8	8	4	8	6
Nb of Inputs							
-			8	8	4	8	8
Nb of Input connectors							
-			8 x M8	8 x M8	4 x M12	4 x M12	4 x M12
Input density / connector							
-			1	1	1	2	2
Adapter connection							
Yellow cable							
Bus signal							
Bus module and sensors power supply							
Black cable							
24 VDC outputs for solenoid valves							
INPUTS connection			M8 - 3 Pins - Female		M12 - 5 Pins Female		
							
			- PIN 1 : +24 VDC - PIN 3 : Common - PIN 4 : Input		PIN 1: +24 VDC PIN 2*: Input 2 & 3 PIN 3: Common PIN 4: Input 0 to 3 PIN 5: n/a *on left connectors only		
LED Display							
Node status : 2 x green/red per node							
Input status : 4 x yellow per node							
Valve power (24V from field supply) : 1 x green / red							

Valve range adapters




Description	Valve range	W (g)	Order code
Moduflex Bus adapter without communication module	Moduflex Valve	30	P2M2HEV0B
	H Series Side ported	200	PSMM41AP
	Micro Valve Bottom ported	200	PSMM42AP
	ISO 15407-2-HA-HB	200	PS5620M41P
	ISO 5599-2 - H1	300	PS4020M41CP

Connectors for Inputs



Description	Valve range	W (g)	Order code
Cable quick connect connector	M8 Male	25	P8CS0803J
	M12 Male - A coding	25	P8CS1204J
"Y" shape	M12 Male - 2 x M12 Female	25	P8CSY1212A
Addressing cable	M12 Male - Jack	100	P8LS12JACK

DeviceNet 16 outputs communication module

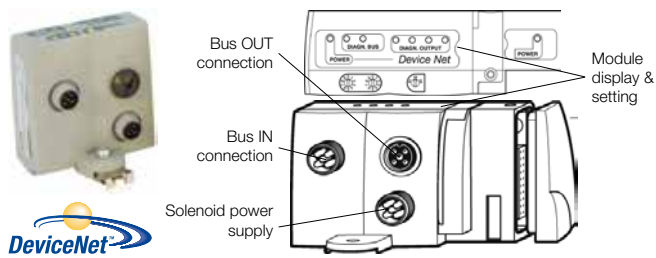

DeviceNet Adapters

Moduflex Valve System		H Series Micro
P2M2HBVD11600	P2M2HBVD21600	Side ported : PSMMD1AP Bottom ported : PSMMD2AP

Adapter connection

Power supply connection

M12 - 5 PINs
Male - B coding



- PIN 1 : n/a
- PIN 2 : n/a
- PIN 3 : 0 VDC Solenoid
- PIN 4 : 24 VDC Solenoid
- PIN 5 : Protected earth (PE)

M12 - 5 PINs
Male - A coding



- PIN 1 : n/a
- PIN 2 : n/a
- PIN 3 : 0 VDC Solenoid
- PIN 4 : 24 VDC Solenoid
- PIN 5 : Protected earth (PE)

Bus IN connection

M12 - 5 PINs - Male - A coding



- PIN 1 : Drain
- PIN 2 : CAN V+
- PIN 3 : CAN V-
- PIN 4 : CAN High
- PIN 5 : CAN Low

Bus OUT connection

M12 - 5 PINs - Female - A coding




- PIN 1 : Drain
- PIN 2 : CAN V+
- PIN 3 : CAN V-
- PIN 4 : CAN High
- PIN 5 : CAN Low

LED Display

Adapter power : 1 x green
DeviceNet status : 2 x green/red
Solenoid pilots power : 1 x green/red
Solenoid pilots diagnostic : 4 x red

CANopen 16 outputs communication module

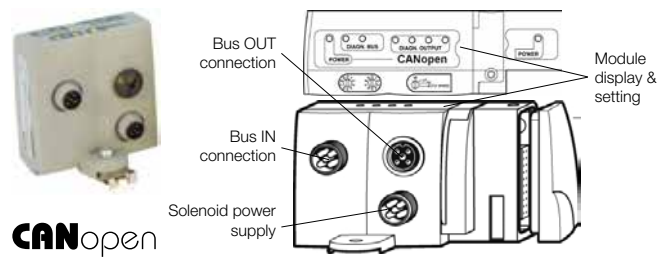

CANopen Adapters

Moduflex Valve System		H Series Micro
P2M2HBVC11600	P2M2HBVC21600	Side ported : PSMMC1AP Bottom ported : PSMMC2AP

Adapter connection

Power supply connection

M12 - 5 PINs
Male - B coding



- PIN 1 : n/a
- PIN 2 : n/a
- PIN 3 : 0 VDC Solenoid
- PIN 4 : 24 VDC Solenoid
- PIN 5 : Protected earth (PE)

M12 - 5 PINs
Male - A coding



- PIN 1 : n/a
- PIN 2 : n/a
- PIN 3 : 0 VDC Solenoid
- PIN 4 : 24 VDC Solenoid
- PIN 5 : Protected earth (PE)

Bus IN connection

M12 - 5 PINs - Male - A coding



- PIN 1 : Drain
- PIN 2 : CAN V+
- PIN 3 : CAN V-
- PIN 4 : CAN High
- PIN 5 : CAN Low

Bus OUT connection

M12 - 5 PINs - Female - A coding



- PIN 1 : Drain
- PIN 2 : CAN V+
- PIN 3 : CAN V-
- PIN 4 : CAN High
- PIN 5 : CAN Low

LED Display

Adapter power : 1 x green
CANopen status : 2 x green/red
Solenoid pilots power : 1 x green/red
Solenoid pilots diagnostic : 4 x red

Valve range adapters



Description	Valve range	W (g)	Order code
Moduflex Bus adapter without communication module	Moduflex Valve	30	P2M2HEV0B
	H Series Side ported	200	PSMM41AP
	Micro valves Bottom ported	200	PSMM42AP
	ISO 15407-2-HA-HB	200	PS5620M41P
	ISO 5599-2 - H1	300	PS4020M41CP

DeviceNet communication module connection accessories



Description	Connector type	W (g)	Order code
Power supply connection	M12 Female - A coding	40	P8CS1205AA
	M12 Female - B coding	40	P8CS1205AB
Bus IN connector	M12 Female - A coding	25	P8CS1205AA
Bus OUT connector	M12 Male - A coding	25	P8CS1205BA
Line termination	M12 Male - A coding	25	P8BPA00MA

Valve range adapters




Description	Valve range	W (g)	Order code
Moduflex Bus adapter without communication module	Moduflex Valve	30	P2M2HEV0B
	H Series Side ported	200	PSMM41AP
	Micro valves Bottom ported	200	PSMM42AP
	ISO 15407-2-HA-HB	200	PS5620M41P
	ISO 5599-2 - H1	300	PS4020M41CP

CANopen communication module connection accessories




Description	Connector type	W (g)	Order code
Power supply connection	M12 Female - A coding	40	P8CS1205AA
	M12 Female - B coding	40	P8CS1205AB
Bus IN connector	M12 Female - A coding	25	P8CS1205AA
Bus OUT connector	M12 Male - A coding	25	P8CS1205BA
Line termination	M12 Male - A coding	25	P8BPA00MA

Profibus DP 16 outputs communication module

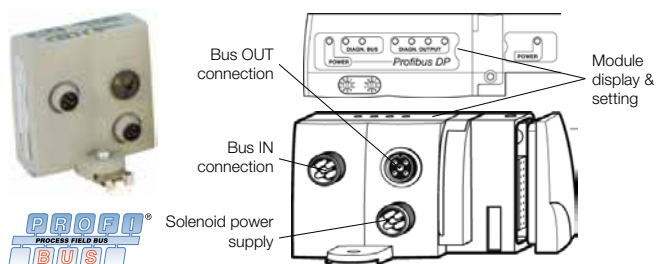

Profibus DP Adapters	
Moduflex Valve System	H Series Micro Valves
P2M2HBVC11600	Side ported : PSMMC1AP Bottom ported : PSMMC2AP
Adapter connection	
Power supply connection	
M12 - 5 PINs - Male - A coding	
- PIN 1 : +24 VDC adapter - PIN 2 : n/a - PIN 3 : 0 VDC Adapter & Solenoids - PIN 4 : 24 VDC Solenoids - PIN 5 : Protected earth (PE)	
Bus IN connection	
M12 - 5 PINs - Male - B coding	
- PIN 1 : +5 VDC Bus - PIN 2 : A - Line - PIN 3 : GND Bus - PIN 4 : B - Line - PIN 5 : Shield	
Bus OUT connection	
M12 - 5 PINs - Female - B coding	
- PIN 1 : +5 VDC Bus - PIN 2 : A - Line - PIN 3 : GND Bus - PIN 4 : B - Line - PIN 5 : Shield	
LED Display	
Adapter power : 1 x green Profibus DP status : 2 x green/red Solenoid pilots power : 1 x green/red Solenoid pilots diagnostic : 4 x red	

InterBus-S 16 outputs communication module

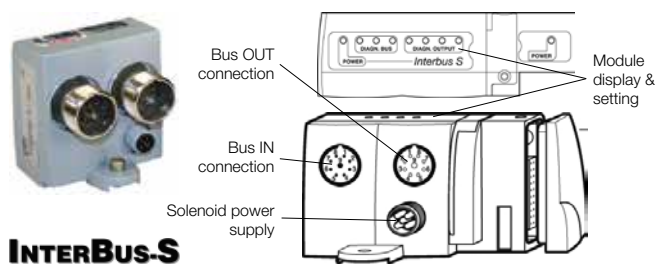

InterBus-S Adapters	
Moduflex Valve System	
P2M2HBVS11600	
Adapter connection	
Power supply connection	
M12 - 5 PINs - Male - A coding	
- PIN 1 : +24 VDC adapter - PIN 2 : n/a - PIN 3 : 0 VDC Adapter & Solenoids - PIN 4 : 24 VDC Solenoids - PIN 5 : Protected earth (PE)	
Bus IN connection	
M23 - 9 PINs - Male	
- PIN 1 : DQ - PIN 2 : DO - PIN 3 : DI - PIN 4 : DI - PIN 5 : Ground - PIN 6 : n/a - PIN 7 : n/a - PIN 8 : n/a - PIN 9 : n/a	
Bus OUT connection	
M23 - 9 PINs - Female	
- PIN 1 : DQ - PIN 2 : DO - PIN 3 : DI - PIN 4 : DI - PIN 5 : Ground - PIN 6 : n/a - PIN 7 : n/a - PIN 8 : n/a - PIN 9 : RBST	
LED Display	
Adapter power : 1 x green InterBus S status : 2 x green/red Solenoid pilots power : 1 x green/red Solenoid pilots diagnostic : 4 x red	

Valve range adapters



Description	Valve range	W (g)	Order code
Moduflex Bus adapter without communication module	Moduflex Valve	30	P2M2HEV0B
	H Series Side ported	200	PSMMC41AP
	Micro valves Bottom ported	200	PSMMC42AP
	ISO 15407-2-HA-HB	200	PS5620M41P
	ISO 5599-2 - H1	300	PS4020M41CP

Profibus DP communication module connection accessories



Description	Connector type	W (g)	Order code
Power supply connection	M12 Female - A coding	40	P8CS1205AA
Bus IN connector	M12 Female - B coding	25	P8CS1205AB
Bus OUT connector	M12 Male - B coding	25	P8CS1205BB
Line termination	M12 Male - B coding	25	P8BPA00MB

Valve range adapters



Description	Valve range	W (g)	Order code
Moduflex Bus adapter without communication module	Moduflex Valve	30	P2M2HEV0B
	H Series Side ported	200	PSMMC41AP
	Micro valves Bottom ported	200	PSMMC42AP
	ISO 15407-2-HA-HB	200	PS5620M41P
	ISO 5599-2 - H1	300	PS4020M41CP

InterBus S communication module connection accessories



Description	Connector type	W (g)	Order code
Power supply connection	M12 Female - A coding	40	P8CS1205AA

TURCK BL67 Communication Gateway

	Protocol	Network connection	Power Sup. Connection	Weight (g)	Order code
	CANopen (Bus IN & OUT)	M12 - A coding	7/8" - 5 Pin's	375	BL67-GW-CO
	DeviceNet™	7/8" - 5 Pin's	7/8" - 5 Pin's	360	BL67-GW-DN
	Profibus-DP (DPV0/DPV1)	M12 - B coding	7/8" - 5 Pin's	370	BL67-GW-DPV1
	Multiprotocol Ethernet: Modbus TCP, EtherNet/IP™ and PROFINET	M12 - D coding	7/8" - 5 Pin's	375	BL67-GW-EN

All TURCK BL67 System Modules can be ordered directly from TURCK under the same part number

TURCK BL67 Programmable Communication Gateway

	Protocol	Network connection	Power Sup. Connection	Weight (g)	Order code
	Profibus-DP	M12 - B coding	7/8" - 5 Pin's	380	BL67-PG-DP
	EtherNet/IP™	M12 - D coding	7/8" - 5 Pin's	375	BL67-PG-EN-IP
	Modbus TCP	M12 - D coding	7/8" - 5 Pin's	375	BL67-PG-EN

All TURCK BL67 System Modules can be ordered directly from TURCK under the same part number

TURCK BL67 Electronic Modules

	Description	Characteristic	Polarity	Weight (g)	Order code
	Blank module			15	BL67-E
	4 Digital Inputs		PNP	55	BL67-4DI-P
			NPN	55	BL67-4DI-N
	8 Digital Inputs	Channel diagnostics	PNP	55	BL67-4DI-PD
			PNP	55	BL67-8DI-P
			NPN	55	BL67-8DI-N
		Channel diagnostics	PNP	55	BL67-8DI-PD
	16 Digital Inputs		PNP	55	BL67-16DI-P
	4 Digital Outputs	0.5 A	PNP	55	BL67-4DO-0.5A-P
		2.0 A	PNP	55	BL67-4DO-2A-P
			NPN	55	BL67-4DO-2A-N
		4.0 A	PNP	55	BL67-4DO-4A-P
	8 Digital Outputs	0.5 A	PNP	55	BL67-8DO-0.5A-P
			NPN	55	BL67-8DO-0.5A-N
	16 Digital Outputs	0.1 A	PNP	55	BL67-16DO-0.1A-P
	4 Digital Inputs & Outputs	0.5 A - Channel Diagnostic	PNP	55	BL67-4DI4DO-PD
	8 Configurable Digital Channels	0.5 A	PNP	55	BL67-8XSG-P
		0.5 A - Channel Diagnostics	PNP	55	BL67-8XSG-PD
	8 Isolated Relay Outputs	Normally open		55	BL67-8DO-R-NO
	2 analogue Inputs	16 bit resolution	Current	55	BL67-2AI-I
			Voltage	55	BL67-2AI-V
		For Pt and Ni sensors		55	BL67-2AI-PT
		For thermoelements		55	BL67-2AI-TC
	4 analogue Inputs	16 bit resolution	Current / Voltage	55	BL67-4AI-V/I
		For thermoelements		55	BL67-4AI-TC
	2 analogue Outputs	16 bit resolution	Current	55	BL67-2AO-I
			Voltage	55	BL67-2AO-V
	4 analogue Outputs	16 bit resolution	Voltage	55	BL67-4AO-V

All TURCK BL67 System Modules can be ordered directly from TURCK under the same part number

The complete TURCK BL67 Remote I/O System range on <http://www.turck.com> and <http://www.parker.com/pneu/fieldbus>

TURCK BL67 Base modules for Digital and Analog I/O Modules



Description	Connector Type	Con. Number	Weight (g)	Order code
Base Modules	M8, 3-pole, female	4	160	BL67-B-4M8
		8	215	BL67-B-8M8
	M8, 4-pole, female	8	215	BL67-B-8M8-4
	M12, 5-pole, female, A-coded	2	185	BL67-B-2M12
	M12, 5-pole, female, A-coded, paired	2	185	BL67-B-2M12-P
	M12, 5-pole, female, A-coded	4	245	BL67-B-4M12
	M12, 5-pole, female, A-coded, paired	4	245	BL67-B-4M12-P
	M23, 12-pole, female	1	190	BL67-B-1M23
	M23, 19-pole, female	1	190	BL67-B-1M23-19

All TURCK BL67 System Modules can be ordered directly from TURCK under the same part number

Electronic and Base Module Combinations

	BL67-B-4M8	BL67-B-8M8	BL67-B-2M12	BL67-B-2M12-P	BL67-B-4M12	BL67-B-4M12-P	BL67-B-1M23	BL67-B-1M23-19	BL67-B-8M8-4
Digital Input Modules									
BL67-4DI-P	✓		✓	✓	✓		✓		
BL67-4DI-N	✓		✓	✓	✓		✓		
BL67-4DI-PD	✓		✓	✓	✓				
BL67-8DI-P		✓			✓	✓	✓		
BL67-8DI-N		✓			✓	✓	✓		
BL67-8DI-PD		✓			✓	✓			
BL67-16DI-P							✓	✓	
Digital Output Modules									
BL67-4DO-0.5A-P	✓		✓	✓	✓		✓		
BL67-4DO-2A-P	✓		✓	✓	✓		✓		
BL67-4DO-2A-N	✓		✓	✓	✓		✓		
BL67-4DO-4A-P	✓		✓	✓	✓		✓		
BL67-8DO-0.5A-P		✓			✓	✓	✓		
BL67-8DO-0.5A-N		✓			✓	✓	✓		
BL67-16DO-0.1A-P							✓	✓	
BL67-4DI4DO-PD		✓			✓	✓			
Configurable Digital Input/Output Modules									
BL67-8XSG-P		✓			✓	✓			
BL67-8XSG-PD		✓			✓	✓			
Relay Output Module									
BL67-8DO-R-NO						✓			
Analogue Input Module									
BL67-2AI-I			✓						
BL67-2AI-V			✓						
BL67-2AI-PT			✓						
BL67-2AI-TC			✓						
BL67-4AI-V/I					✓				
BL67-4AI-TC					✓				
Analogue Output Module									
BL67-2AO-I			✓						
BL67-2AO-V			✓						
BL67-4AO-V					✓				

The complete TURCK BL67 Remote I/O System range on <http://www.turck.com>

TURCK BL67 Power Feeding and Base Modules




Description	Connector Type	Weight (g)	Order code
Power Feeding Module for 24 VDC additional sourcing		55	BL67-PF-24VDC
Base Modules	1 x 7/8", 5-pole, male	VI / VO Sourcing	55
		VO Sourcing	55
	1 x 7/8", 4-pole, male		55
			BL67-B-1RSM
			BL67-B-1RSM-VO
			BL67-B-1RSM-4

All TURCK BL67 System Modules can be ordered directly from TURCK under the same part number

Power Feeding Base Modules Connection


Standard version

BL67-B-1RSM

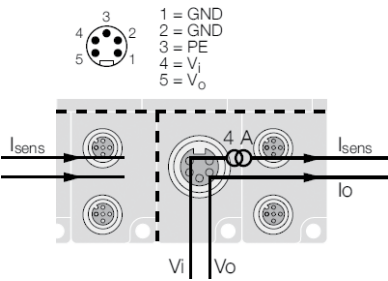


Other possible versions


BL67-B-1RSM-VO

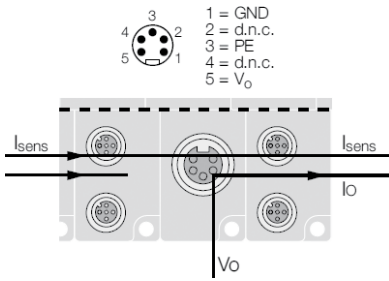

BL67-B-1RSM-4

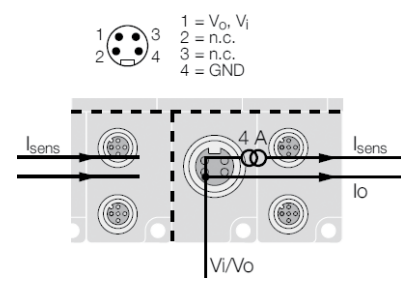

TURCK BL67 CANopen Gateway and Base Module



Description	Connector Type	Weight (g)	Order code
CANopen Gateway Module for CANopen Valve Island Interface		55	BL67-1CVI
Base Modules	1 x M12, 5-pole, female, A-coded	170	BL67-B-1M12



All TURCK BL67 System Modules can be ordered directly from TURCK under the same part number





BL67-1CVI electronic module with BL67-B-1M12
• Offering a CANopen Sub-Network connectivity up to 8 CANopen slaves

The complete TURCK BL67 Remote I/O System range on <http://www.turck.com>


H Series ISO 15407-2 & 5599-2 Sizes 02 to 3 with H Series Industrial Communication
Fieldbus System

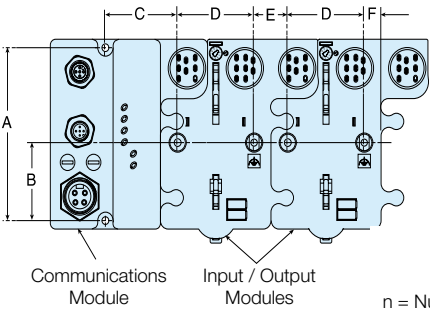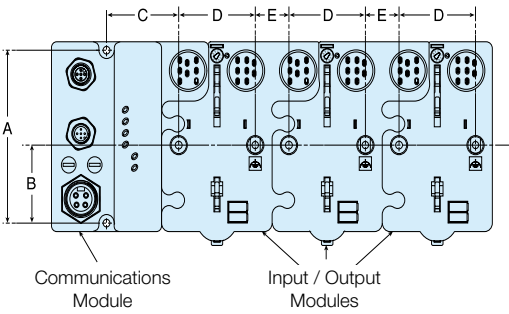

n = Number of 18mm HB bases
N1 = Number of 26mm HA bases
W = Width of 18mm HB bases
W1 = Width of 26mm HA bases

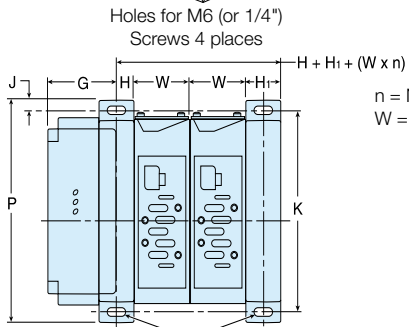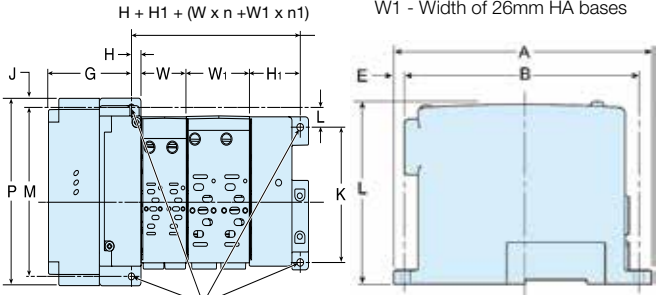

n = Number of H1 bases
W = Width of H1 bases

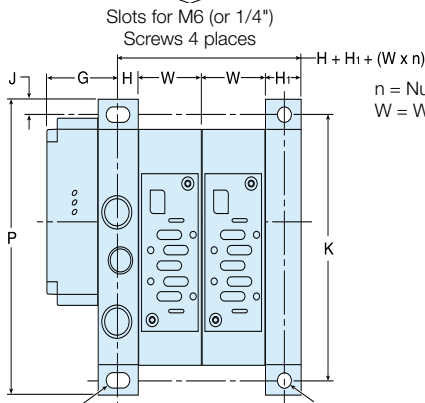

HA / HB Dimensions


	A	B	C	D	E	F
HA/HB	102	46	48	51	22	11

	A	B	E	L	G	H	H ₁
HA/HB	152	137	7,5	106	68	8,4	45,8
	J	K	L	M	P	W	W ₁
HA/HB	4	110	16	137	152	40,8	56,8

	G	H	H ₁	J	K	P	W
H1	56	15,9	15,9	8,5	165	182	49
H2	58	18	15	12	215	239	56
H3	64	24	16,5	15	265	295	71


H Series Industrial Communication with H Series Micro Valves

Side ported

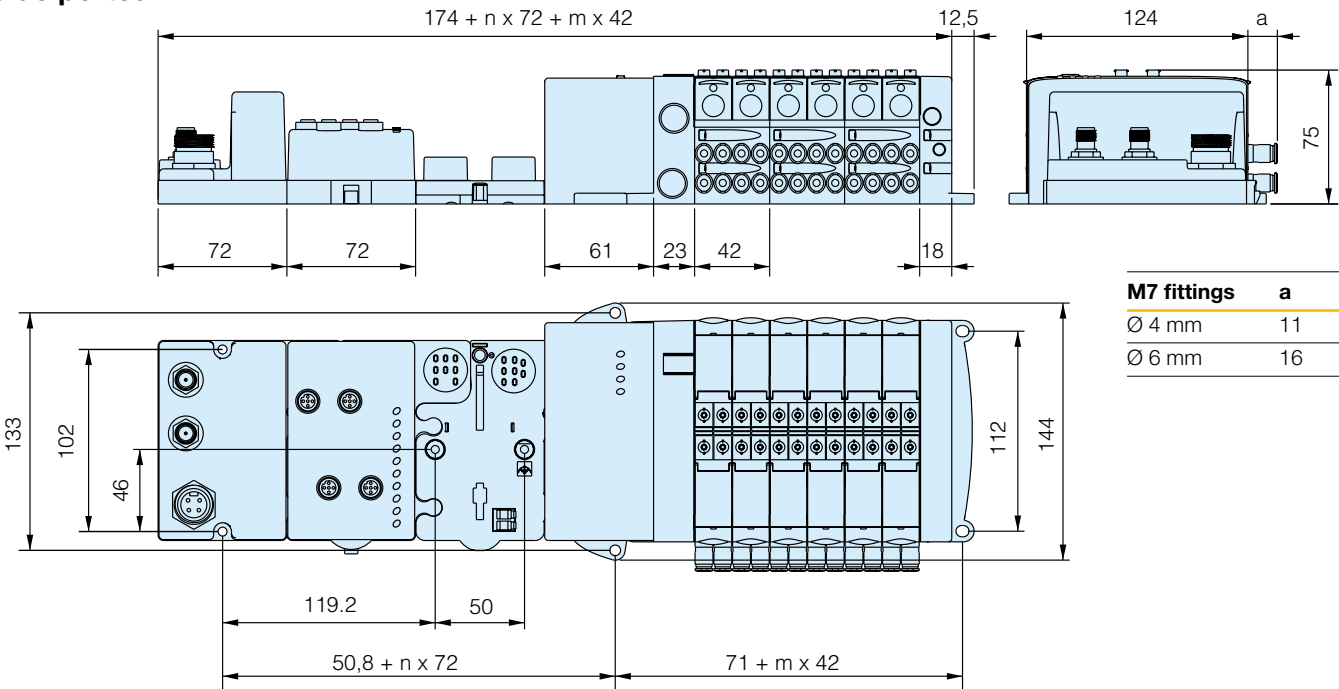


Note:
m = number of manifolds
(one manifold for 4 valves
modules)
n = number of I/O modules

Bottom ported

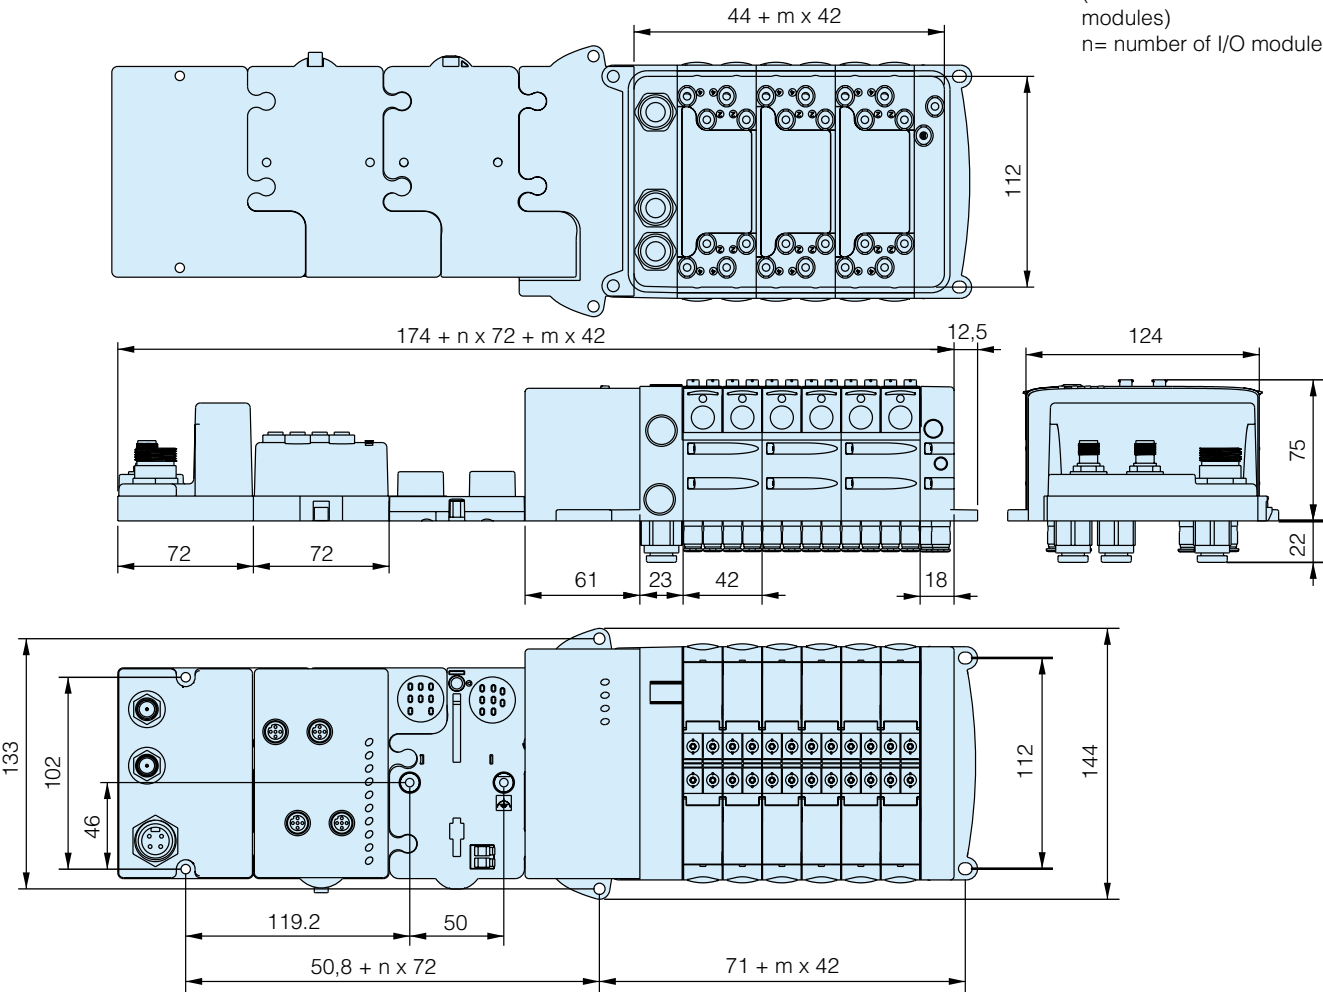


Moduflex Bus with Moduflex Valve

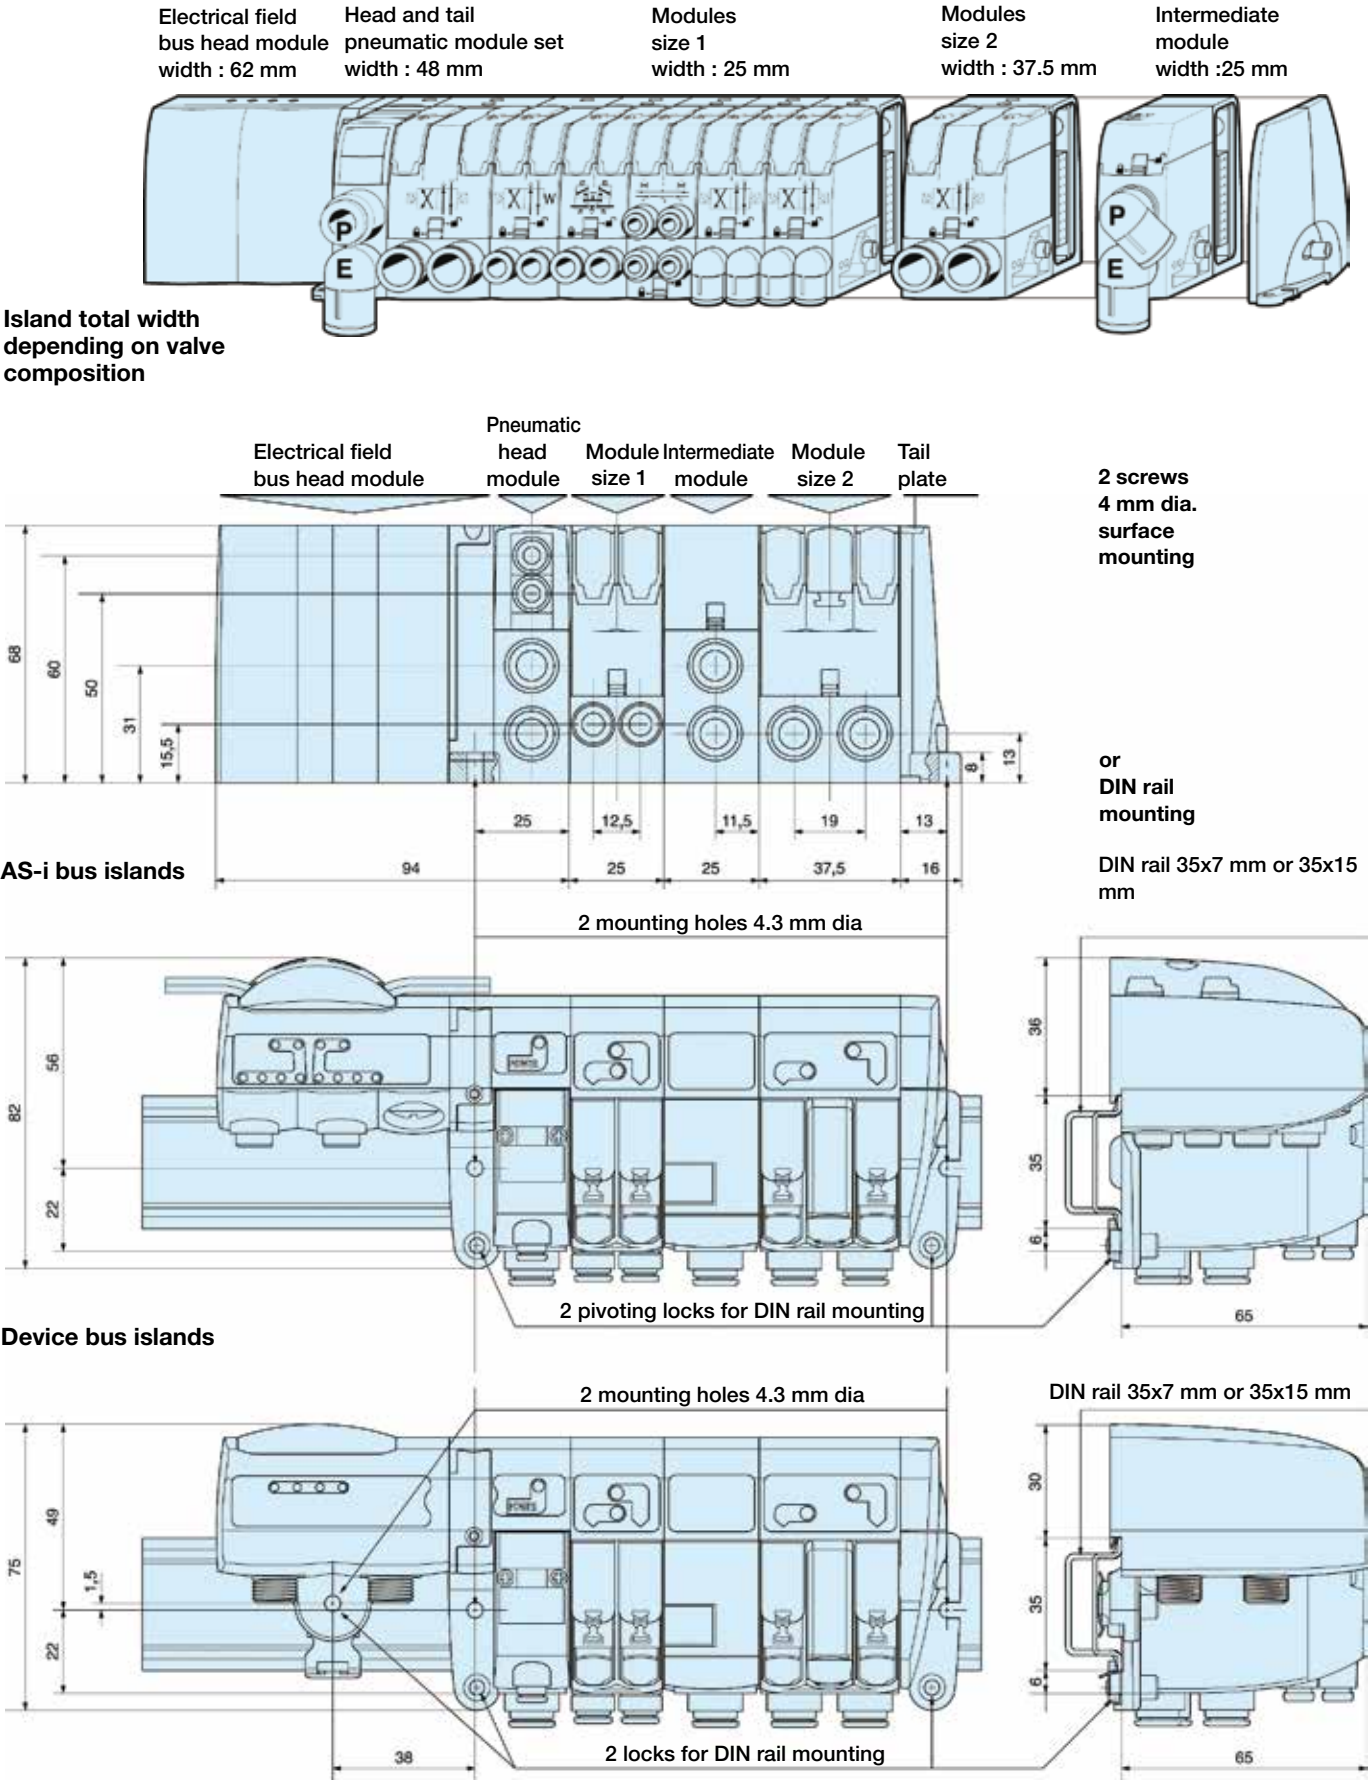


H Series ISO 15407-2 & 5599-2 Sizes 02 to 3 with Moduflex Bus

HA/HB Series

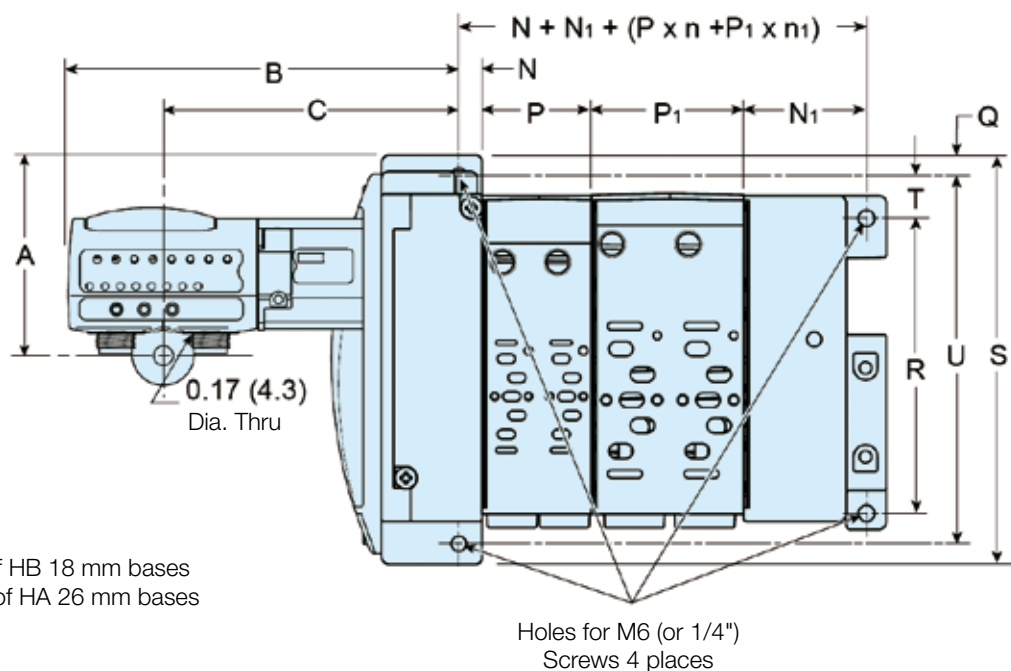


H1/H2/H3 Series

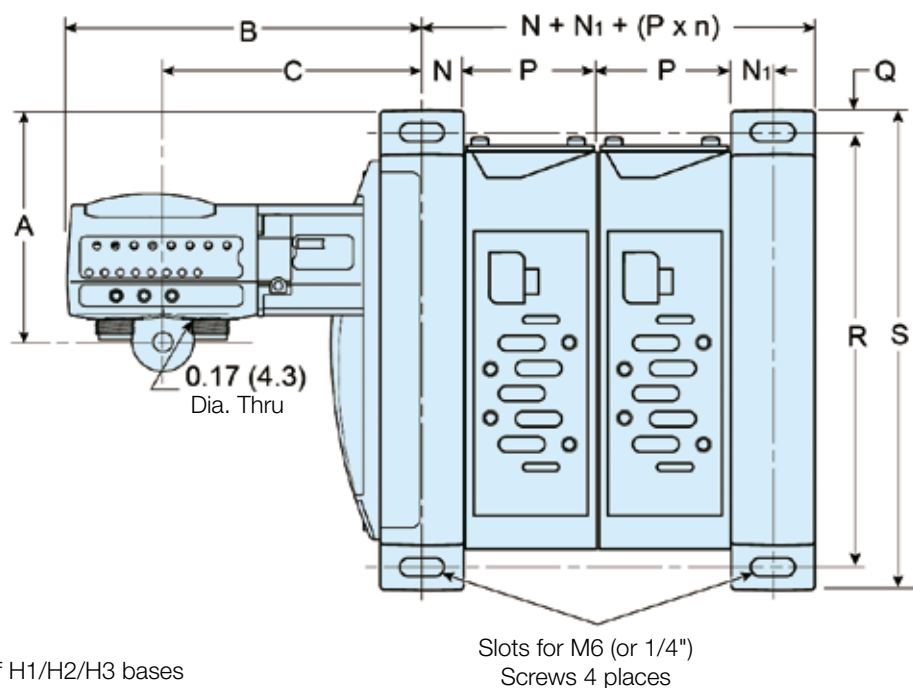

	A	B	C	N	N ₁	P	P ₁	Q	R	S	T	U
HA/HB	69,8	142,5	111,8	8,4	45,8	40,8	56,8	4	110	152	16	137
H1	82	130,2	160,9	15,9	15,9	49	-	8,5	165	182	-	-
H2	78,2	130,3	161	18	15	56	-	12	215	239	-	-
H3	84,2	138,2	168,9	24	16,5	71	-	15	265	295	-	-


Moduflex Bus with H Series Micro Valves

Side ported




Note:
m = number of manifolds
(one manifold for 4 valves
modules)

Bottom ported

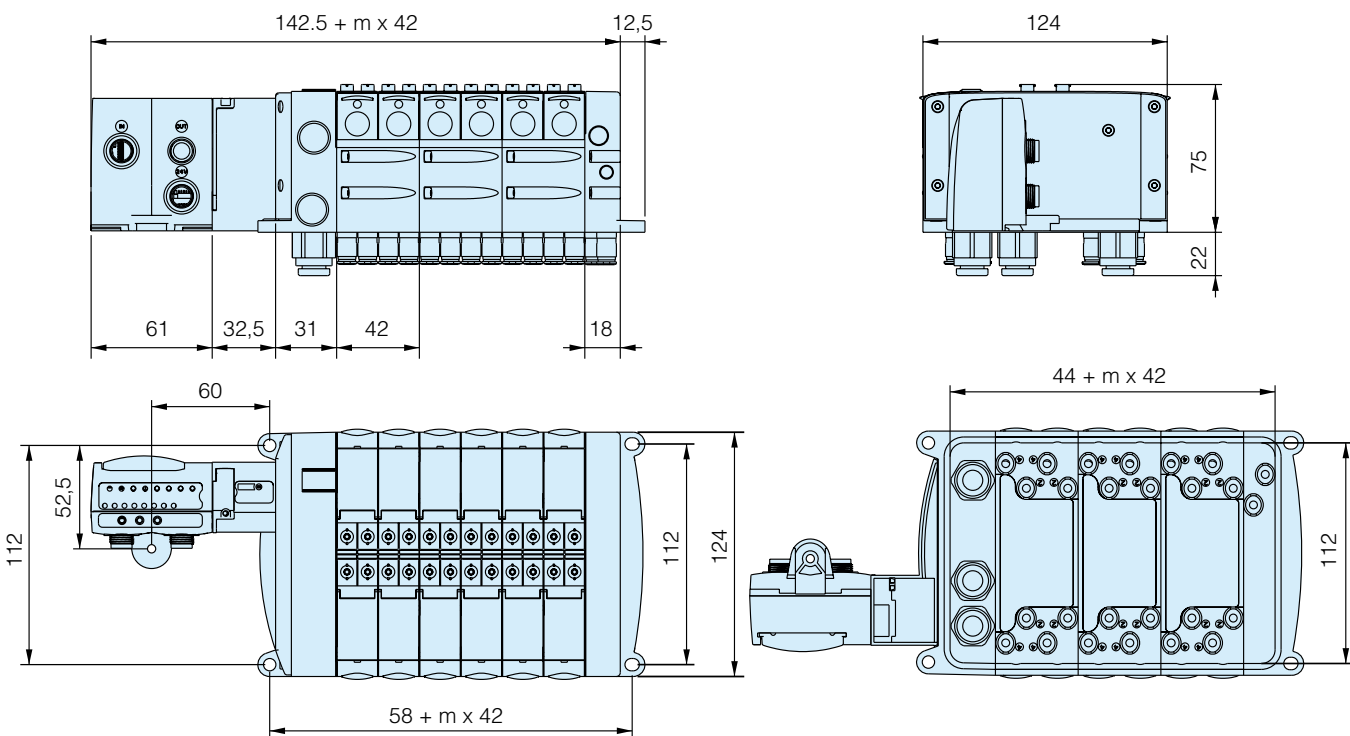


H Series ISO 15407-2 & 5599-2 Sizes 02 to 3 with Turck BL67 Remote IO System

HA/HB Series

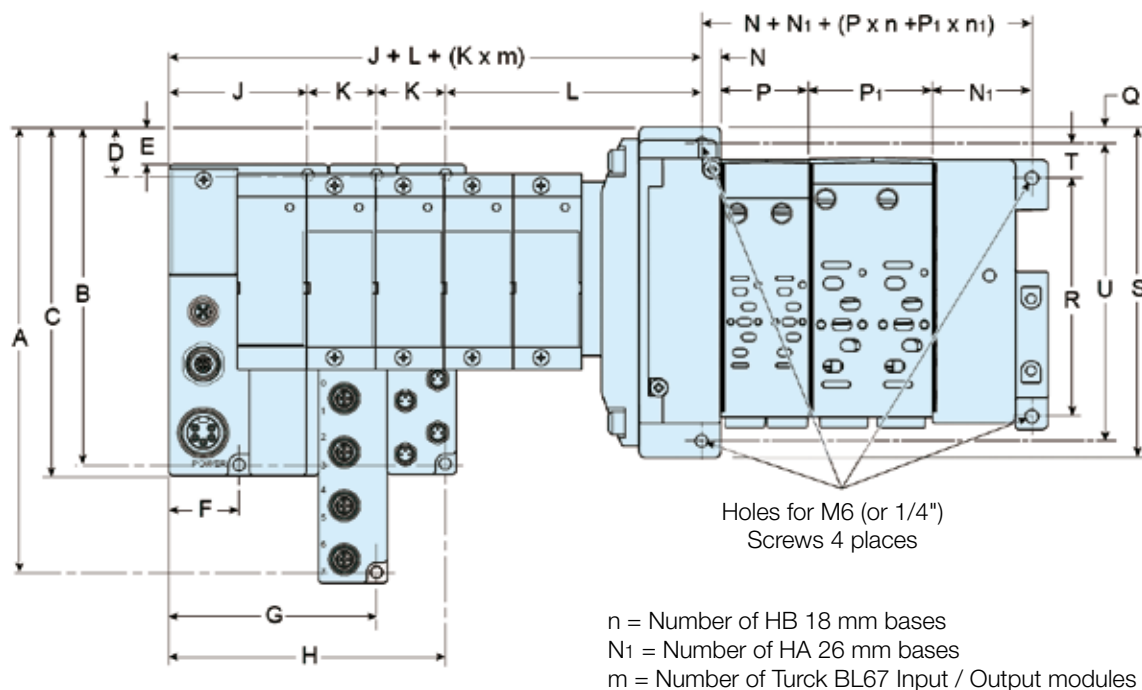


H1/H2/H3 Series

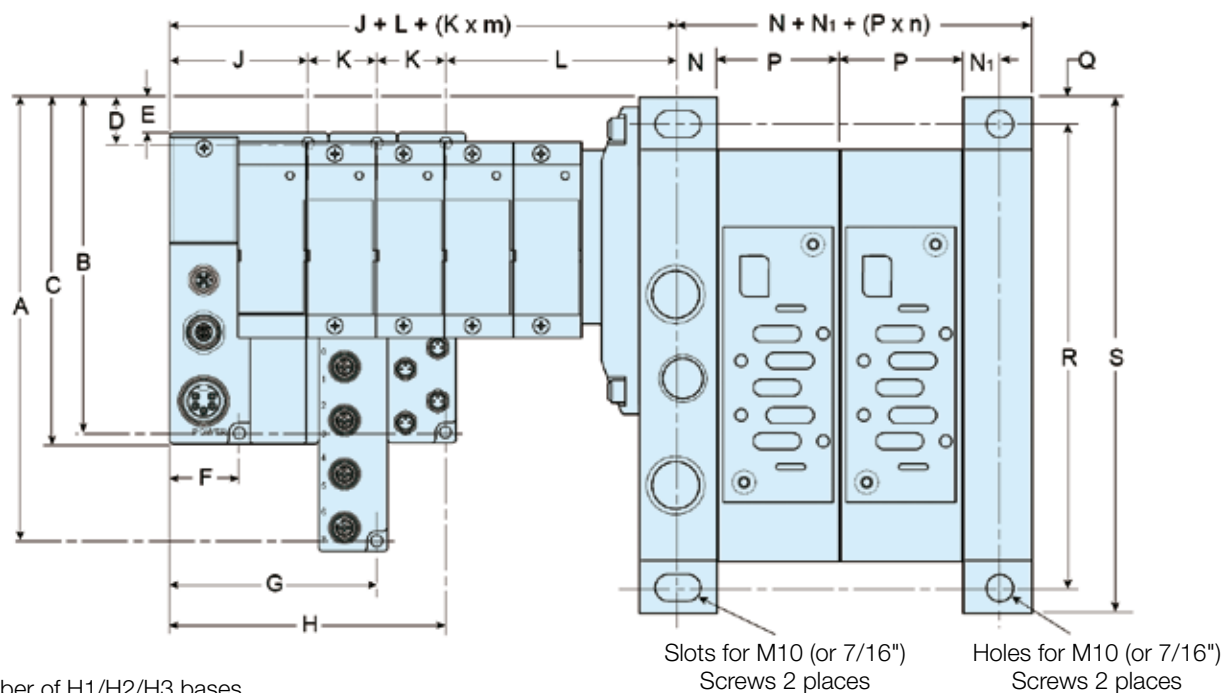


n = Number of H1/H2/H3 bases
m = Number of Turck BL67 Input / Output modules

	A	B	C	D	E	F	G	H	J	K	L	N	N ₁	P	P ₁	Q	R	S	T	U
HA/HB	204,5	154,5	159,5	19,5	14,5	32,5	96,5	128,5	64,5	32	120,8	8,4	45,8	40,8	56,8	4	110	152	16	137
H1	216,7	166,7	171,7	31,7	26,7	32,5	96,5	128,5	64,5	32	108,5	15,9	15,9	49	-	8,5	165	182	-	-
H2	212,9	162,9	167,9	27,9	22,9	32,5	96,5	128,5	64,5	32	108,6	18	15	56	-	12	215	239	-	-
H3	218,9	168,9	173,9	33,9	28,9	32,5	96,5	128,5	64,5	32	116,6	24	16,5	71	-	15	265	295	-	-

H Series Micro Valves with TURCK BL67 Remote I/O System

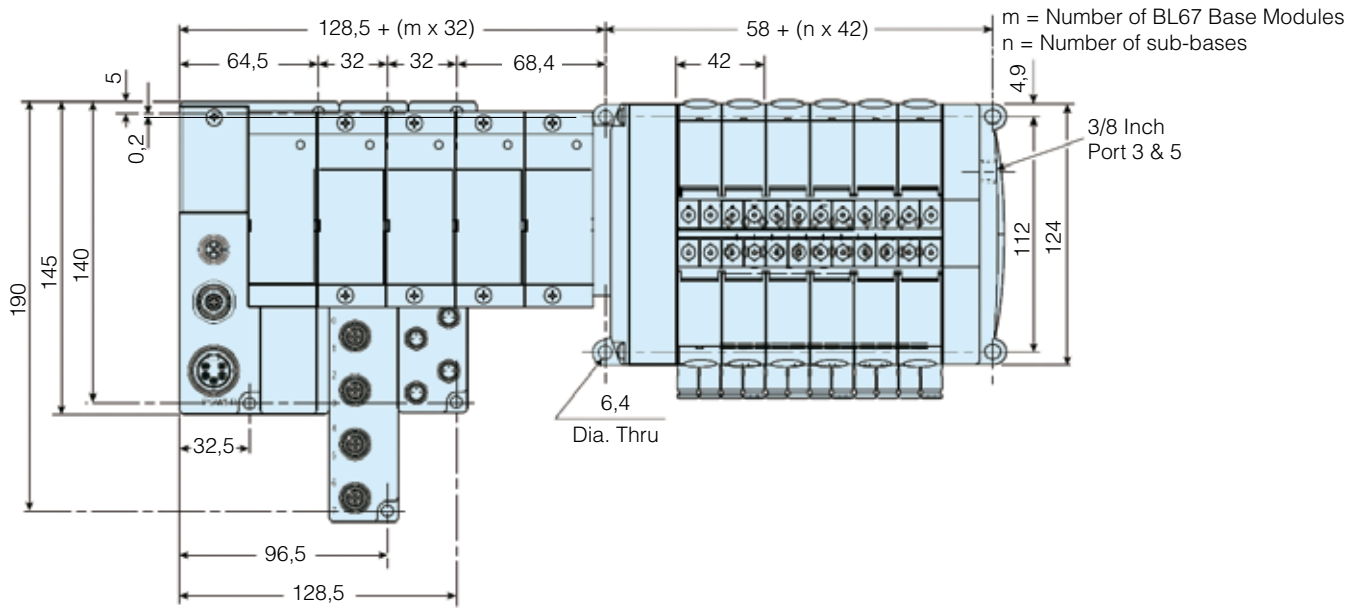

H Series Micro Valves with TURCK BL67 adaptor - Side ported

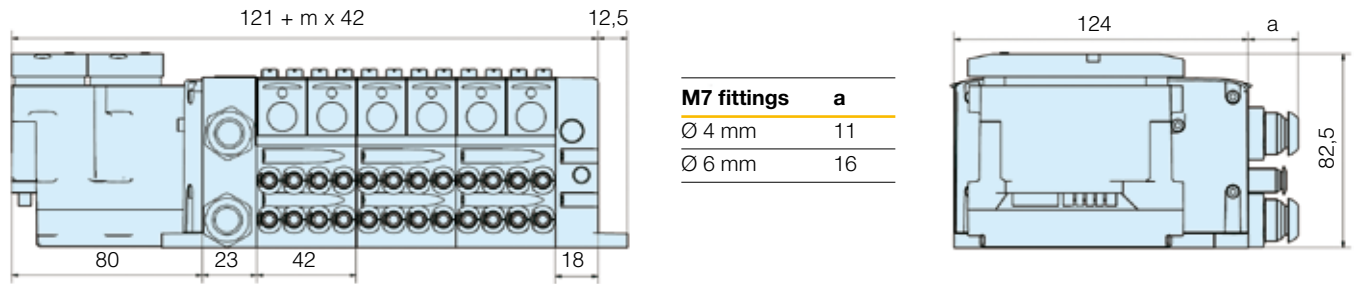

H Series Micro Valves with TURCK BL67 adaptor - Bottom ported

